



## Your Reliable Source



Hawk has been designing and building high quality floor machines and specialty equipment in Elkhart, IN since 1995.

Hawk is an innovator in development of orbital floor machine technology. We currently offer five platforms of orbital equipment, making Hawk a leader in the industry.

Breakthrough technology continues with our exclusive WD™ Detachable Handle. The results are substantial improvements in productivity and user safety. WD™ handles are now available on both rotary and orbital floor machines.

## Discover the Hawk Line

### Floor Machines

Hawk Floor Machine Line.....	3
Hawk Mighty .....	4
Hawk HD .....	5
Hawk XHD .....	6
Hawk 2-Speed .....	7
Hawk XHD 2-Speed .....	8
Brute Brute Severe Duty.....	9
Hawk TEXHD .....	10
Hawk Pro .....	11
Hawk Osprey Restoration Machine.....	12

### Floating Head Floor Machines

WingSpan Wide Area .....	13
Glide Freedom.....	14
Glide Freedom 2-Speed.....	15
Merlin TEXHD.....	16
Merlin 2-Speed XHD .....	17

### Orbital Floor Machines

G2 Raptor .....	18
TigerHawk 1410 .....	19
TigerHawk 2014.....	20
TigerHawk 2814.....	21
Hawk Red Tail 2014.....	22

### High Speed Burnishers

Hawk High-Speed .....	23
Hawk High-Speed AC .....	24
Hawk Centerfold High Speed .....	25
Hawk Centerfold High Speed AC.....	26

### Black Hawk Machines

BlackHawk FM Rotary Floor Machines.....	27
BlackHawk 1250 High Speed Burnisher.....	28
BlackHawk 1500 High Speed Burnisher.....	29

### Air Movers

BH33ADT Air Mover.....	30
BH20 & BH50 Air Movers .....	31
Industrial Air Mover .....	32

### Vacuums

Hawk 20 and 55 Gallon Wet/Dry Tank Vacuum.....	33
Hawk Harrier Backpack Vacuum.....	34

### Specialty Equipment

Hot Shot Mini-Vactor Carpet Extractor.....	35
Hawk Talon Edger Floor Machine.....	36
Hawk Propane Burnisher.....	37

### Accessories

Rotary Floor Machine Accessories.....	38
Orbital Floor Machine Accessories.....	40
High Speed Burnisher Accessories.....	41
Private Branding Program .....	42





**HAWK**  
ENTERPRISES

# HAWK Floor Machines

Rotary, Orbital, High Speed, Economy



**Hawk Mighty**  
Small Area Stripping,  
Scrubbing, Polishing  
175 RPM, 13", 15"



**Hawk HD**  
Stripping, Scrubbing,  
Carpet Care  
175 RPM,  
13", 15", 17", 20"



**Hawk XHD**  
Xtra Duty Stripping,  
Scrubbing, Carpet Care  
175 RPM,  
13", 15", 17", 20"



**Hawk 2-Speed**  
Stripping, Buffing,  
Carpet Care  
175/320 RPM,  
13", 15", 17", 20"



**Hawk XHD 2-Speed**  
Stripping, Buffing,  
Carpet Care  
165/300 RPM,  
13", 15", 17", 20"



**Brute**  
Deluxe Severe Duty  
Stripping, Sanding,  
Resurfacing, Carpet Care  
175 RPM, 13", 15", 17", 20"



**Hawk TEXHD**  
Severe Duty  
Stripping, Sanding,  
Resurfacing, Carpet Care  
165 RPM, 13", 15", 17", 20"



**Hawk Pro**  
Professional Floor  
Restoration Machine  
165 RPM,  
13", 15", 17", 20"



**Hawk Osprey**  
All Surface Floor  
Restoration Machine  
165 RPM,  
13", 15", 17", 20"



**Hawk Wingspan**  
Wide Area Floor Machine  
Stripping, Scrubbing,  
Shampooing, Resurfacing  
165 RPM, 29"



**Hawk Glide Freedom**  
WD™ Floor Machines  
Floor & Carpet Care  
175 RPM - Standard,  
165 RPM - XHD  
13", 15", 17", 20"



**Hawk Glide Freedom**  
**Dual-Speed**  
WD™ Floor Machines  
Floor & Carpet Care  
175-320 RPM - Standard,  
165-320 RPM - XHD



**Hawk Merlin**  
Severe Duty  
WD™ Floor Machines  
175 RPM  
13", 15", 17", 20"



**Hawk Merlin Dual-Speed**  
Severe Duty  
WD™ Floor Machines  
165-300 RPM  
13", 15", 17", 20"



**G2 Raptor**  
20"x14" Orbital  
Floor Machine  
Scrubbing, Wet/Dry  
Stripping 1740 RPM



**Hawk 1410**  
Small Area Orbital  
Floor Machine  
1725 RPM  
14"x10"



**Hawk 2014**  
Deluxe Orbital  
Floor Machine  
1725 RPM  
20"x14"



**Hawk 2814**  
Wide Area Orbital  
Floor Machine  
1725 RPM  
28"x14"



**Hawk RedTail 2014**  
Surface Prep  
Floor Machine  
1725 RPM  
20"x14"



**Hawk High Speed**  
DC Motor  
1500, 1800, 2000 RPM  
AC Motor  
1000, 1250, 1500 RPM  
13", 15", 17", 20"



**Hawk High Speed**  
**Centerfold Burnishers**  
DC Motor  
1500, 1800, 2000 RPM  
AC Motor  
1000, 1250, 1500 RPM  
13", 15", 17", 20"



**BlackHawk FM Buffer**  
Stripping, Buffing,  
Carpet Care  
165 RPM,  
17", 20"



**BlackHawk 1500 Burnisher**  
**BlackHawk 1200 Burnisher**  
DC Motor  
1500 RPM - 20"  
AC Motor  
1250 RPM - 20"



## Stripping, Scrubbing, Polishing

Machine operators will appreciate the performance, versatility and value in the Hawk Mighty. The 1.0 HP TEFC AC motor and XHD gears deliver huge power in a small and manageable machine. It's ideal for use in tight spaces, restrooms, edging and stairs. The "TH" models with Telescoping Handle fit every operator's height, and store in tight spaces.

### Power

- 1.0 HP, 56 frame, dual capacitor, AC motor
- 115-230V , 50/60 Hz power. 50 ft. 14-3 SJT power cord.

### Drive System

- Triple-planetary XHD 11:1 helical-cut industrial gears, case hardened with steel coupler. Drives brushes at 165 RPM.

### Engineered Design

- All steel construction with welded, powder-coated frame
- Telescoping handle (TH models) adjusts from 36" to 48"
- 13" and 15" brush covers have full wraparound bumper
- One piece powder-coated, heavy duty steel handle with 5-position pin lock
- Comfortable vinyl handle grips
- Thumb-operated safety switch
- Negative pressure on/off switch
- Dual steel operating triggers
- 1"x5" non-marking ball-bearing wheels

### Safety Features

- Quiet 64 dB operation. Meets GS42 standard.
- Built with UL Listed components

### Accessories

- 13" and 15" splash guard, 2.5 gallon solution tank, 4 rotary brushes, diamond pad drivers, weighted diamond pad drivers, standard pads, drivers and hardware. Details and part numbers pages 38-39.



## Specifications

Model	MIGHTY13	MIGHTY 13-TH	MIGHTY15	MIGHTY15-TH
Part #	F0060-13	F0060-13TH	F0060-15	F0060-15TH
Size	13"	13"	15"	15"
Pad Size	12"	12"	14"	14"
Telescoping Handle	No	Yes	No	Yes
Pad Speed	165 RPM	165 RPM	165 RPM	165 RPM
Amp Draw	4.9 Amp	4.9 Amp	6 Amp	6 Amp
Weight	87 lbs.	87 lbs.	88 lbs.	88 lbs.

## All Models

Motor	1.0 HP, 56 frame, dual capacitor AC motor
Power Source	115-230V, 50/60 Hz power
Power Cord	50 ft. 14-3 SJT power cord w/molded plug
Driver System	Triple-planetary XHD 11:1 helical-cut industrial gears
dB Rating	64 dB - Meets GS42 standard

Subject to Change Without Notice




Works in  
Tight Spaces



Telescoping Handle  
Adjusts from 36" to 48"



Optional 2.5-Gallon  
Solution Tank



Handle with 6-Position  
Pin Lock





## Stripping, Scrubbing, Carpet Care

Realize maximum power with the twin capacitor, AC motor and Hawk's ruggedly reliable floor machine design. Machine operators appreciate the solid performance of an extremely well-built floor machine that delivers reliability on every job they tackle.

### Power

- 1.5 HP, 66 frame, dual capacitor AC motor
- 115V, 60 Hz power, (230V optional)
- 50 ft. (12-3), 2-piece power cord with molded plug.  
75 ft. (12-3) and 100 ft. (12-3) power cord available.

### Drive System

- Triple-planetary HD 10:1 helical-cut commercial gears drive pads and brushes at 175 RPM

### Engineered Design

- All steel construction with welded, powder-coated frame
- One piece chrome, heavy-duty steel handle with vinyl grips
- Variable position positive handle lock
- 13", 15", 17" and 20" brush covers with 360 degree wraparound bumper
- Dual steel operating triggers
- Negative pressure on/off switch
- Thumb-operated safety switch
- 1" x 5" non-marking ball-bearing wheels

### Safety Features

- Quiet 60 dB operation. Meets GS42 standard.
- UL/CUL listed

### Accessories

- Dust pickup, splash guard, hexagonal weights, 20 lb. frame weights, 4 gallon solution tank, brushes, pads and drivers, sandpaper drivers
- Details and part numbers on pages 38-39.



## Specifications

Model #	HP1513-HD	HP1515-HD	HP1517-HD	HP1520-HD
Part #	F0013	F0006	F0009	F0012
Machine Size	13 inch	15 inch	17 inch	20 inch
Pad Size	12 inch	14 inch	16 inch	19 inch
Pad Speed	175 RPM	175 RPM	175 RPM	175 RPM
Current Draw	5.3 Amp	5.7 Amp	5.9 Amp	6.5 Amp

## All Models

Motor	1.5 HP, 66 frame, dual capacitor AC motor
Power	115V, 60 Hz power, (230V optional)
Power Cord	50 ft. 12-3 two-piece power cord with molded plug
Drive System	Triple-planetary HD 10:1 helical-cut commercial gears
dB Rating	60 dB - Meets GS42 standard

Subject to Change Without Notice



Welded Steel  
Frame and Handle



Permanently Lubricated  
Triple Planetary Gears



DX Model Includes  
Chrome Motor, Splash  
Guard & Pad Driver



7 Private Brand Colors  
Plus Chrome



## Stripping, Scrubbing, Carpet Care

When the job gets tough, the tough get going with the HAWK XHD. The heavy-duty machine is powered by the 1.5 HP dual capacitor motor combined with a super-strong XHD 11:1 gearbox. Offered with a wide range of tools, accessories and optional weights, the XHD handles every job.

### Power

- 1.5 HP, 66 frame, dual capacitor AC motor
- 115V, 60 Hz Power (230V optional).
- 50 ft. (12-3) industrial power cord with molded plug.
- 75 ft. (12-3) and 100 ft. (12-3) cords available.

### Drive System

- Triple-planetary XHD 11:1 helical-cut industrial gears, case hardened with steel coupler, drives brushes and pads at 165 RPM

### Engineered Design

- All steel construction with welded, powder-coated frame
- One piece chrome, heavy-duty steel handle with variable position lock and vinyl grips
- 13", 15", 17" and 20" steel brush covers with 360 degree wraparound bumper
- Dual steel operating triggers
- Negative pressure on/off switch
- Thumb-operated safety switch
- 1" x 5" non-marking ball bearing wheels

### Safety Features

- Quiet 60 dB operation. Meets GS42 standard.
- UL/CUL listed

### Accessories

- Dust pickup, splash guard, hexagonal weights, 20 lb. frame weights, 4 gallon solution tank, brushes, pads and drivers,

## Specifications

Model #	HP1513-XHD	HP1515-XHD	HP1517-XHD	HP1520-XHD
Part #	F0013XHD	F0006XHD	F009XHD	F0012XHD
Machine Size	13 inch	15 inch	17 inch	20 inch
Pad Size	12 inch	14 inch	16 inch	19 inch
Pad Speed	165 RPM	165 RPM	165 RPM	165 RPM
Amp Draw	5.3 Amp	5.6 Amp	6.1 Amp	6.8 Amp

## All Models

Motor	1.5 HP, 66 frame dual capacitor AC motor
Power	115V, 60 Hz power. (230V optional).
Power Cord	50 ft. 14-3 STO industrial power cord w/molded plug
Drive System	Triple-planetary XHD 11:1 helical-cut industrial gears
dB Rating	60 dB - Meets GS42 standard

Subject to Change Without Notice



Welded Steel Frame,  
Handle & Brush Covers



Permanently Lubricated  
Triple Planetary Gears



Wet Scrub with Optional  
4 Gallon Solution Tank



7 Private Brand Colors  
Plus Chrome



## Stripping, Buffing, Carpet Care

The Hawk 2-Speed floor machine performs heavy-duty scrubbing and stripping at the standard 175 RPM speed. With the flip of the conveniently located toggle switch, buff and polish at 320 RPM.

### Power

- 1.5 HP, 66 frame, DC rectified 2-speed motor
- 115V, 60 Hz power, (230V optional)
- 50 ft., (14-3) STO industrial power cord with molded plug
- Change speed with Hi-Lo speed control switch on handle

### Drive System

- Triple-planetary HD 10:1 helical-cut commercial gears drive pads/brushes at 175 or 320 RPM

### Engineered Design

- All steel construction with welded, powder-coated frame
- One piece chrome, heavy-duty steel handle with variable position lock and vinyl grips
- 13", 15", 17" and 20" brush covers with 360 degree wraparound bumper
- Dual steel operating triggers
- Negative pressure on/off switch
- Thumb-operated safety switch
- 1" x 5" non-marking ball bearing wheels

### Safety Features

- Quiet operation – 62 dB (low speed), 69 dB (high speed). Meets GS42 standard.
- UL/CUL listed

### Accessories

- Dust pickup, splash guard, hexagonal weights, 20 lb. frame weights, 4 gallon solution tank, brushes, pads and drivers, sandpaper drivers. Details and part numbers pages 38-39.



## Specifications

Model #	HP1513-2S	HP1515-2S	HP1517-2S	HP1520-2S
Part #	F0003-13	F0003-15	F0003-17	F0003-20
Machine Size	13 inch	15 inch	17 inch	20 inch
Pad Size	12 inch	14 inch	16 inch	19 inch
Pad Speed RPM	175/320 RPM	175/320 RPM	175/320 RPM	175/320 RPM
Amp Draw	7.8/8.2 Amp	8.1/8.5 Amp	8.5/9.1 Amp	9.2/9.5 Amp
All Sizes				
Motor	1.5 HP, 66 frame, DC rectified 2-speed motor			
Power	115V, 60 Hz power, (230V optional)			
Power Cord	50 ft. (14-3) STO industrial power cord w/molded plug			
Drive System	Triple-planetary HD 10:1 helical-cut commercial gears			
dB Rating	62dB (175 RPM) - 69dB (320 RPM) - Meets GS42 standard			

Subject to Change Without Notice



Hi/Lo Speed Motor  
Switch on Handle



7 Private Brand Color  
Brush Covers



Optional 4 Gallon  
Solution Tank



1.5 HP Power to Drive  
the Range of Brushes





## HAWK 2-Speed XHD Xtra Duty Dual-Speed Floor Machine

### Stripping, Buffing, Carpet Care

The Hawk 2-Speed XHD strips and scrubs at 165 RPM. With a flip of the switch, polish the floor at 300 RPM. This heavy-duty machine is powered by the 1.5 HP, rectified, 2-speed AC motor with an industrial XHD 11:1 gearbox.

#### Power

- 1.5 HP, 66 frame, DC rectified 2-speed motor
- 115V, 60 Hz power, (230V optional)
- 50 ft., (14-3) 2-piece industrial power cord with molded plug
- Change speed with Hi-Lo speed control switch on the handle

#### Drive System

- Triple-planetary XHD 11:1 helical-cut industrial gears, case hardened with steel coupler drive brushes and pads at 165 or 300 RPM

#### Engineered Design

- All steel construction with welded, powder-coated frame
- One piece chrome, heavy-duty steel handle with variable position lock and vinyl grips
- Variable position positive handle lock
- 13", 15", 17" and 20" steel brush covers with 360 degree wraparound bumper
- Dual steel operating triggers. Negative pressure on/off switch.
- Thumb-operated safety switch
- 1" x 5" non-marking ball bearing wheels

#### Safety Features

- Quiet operation – 62 dB (low speed), 69 dB (high speed). Meets GS42 standard.
- UL/CUL listed

#### Accessories / Aftermarket

- Dust pickup, splash guard, hexagonal weights, 20 lb. frame weights, 4 gallon solution tank, 5 brushes, pads and drivers, sandpaper drivers. Details on pages 38-39.



### Specifications

Model #	HP1513 XHD2S	HP1515 XHD2S	HP1517 XHD2S	HP1520 XHD2S
Part #	F0013XHD-2S	F0006XHD-2S	F009XHD-2S	F0012XHD-2S
Machine Size	13 inch	15 inch	17 inch	20 inch
Pad Size	12 inch	14 inch	16 inch	19 inch
Pad Speed	165/300 RPM	165/300 RPM	165/300 RPM	165/300 RPM
Amp Draw	5.3 /6.3 Amp	5.6/6.6 Amp	6.1/6.8 Amp	6.8/7.2 Amp

### All Sizes

Motor	1.5 HP, 66 frame, DC rectified 2-speed motor
Power	115V, 60 Hz power, (230V optional)
Power Cord	50 ft. 14-3 STO industrial power cord w/molded plug
Drive System	Triple-planetary XHD 11:1 helical-cut industrial gears
dB Rating	62dB (165 RPM) - 69dB (300 RPM) - Meets GS42 standard

Subject to Change Without Notice



Handle Mounted  
2-Speed Switch



Dust Control Option  
17" & 20" Stand Kit



4 Gallon Solution Tank  
& Splash Guard Option



7 Private Brand Colors



### Stripping, Sanding, Carpet Care, Resurfacing

The Brute is built with severe-duty gear drive, a steel coupler and the 180-frame TEFC chrome motor.

Use the Brute in the harshest conditions - dust, moisture, chemicals, and for sanding, screening, stone and concrete work.

#### Power

- 1.5 HP, 180 frame, TEFC dual capacitor AC motor
- 115-230V, 60 Hz power
- 50 ft., (12-3) SJTOW industrial power cord with molded plug

#### Drive System

- Triple-planetary XHD 11:1 helical-cut industrial gears, case-hardened with steel coupler
- Drives brushes and pads at 165 RPM

#### Engineered Design

- All steel construction with welded, powder-coated frame
- One piece chrome, heavy-duty steel handle with variable position handle lock and vinyl grips. Deluxe chrome brush cover.
- 13", 15", 17" and 20" chromed steel brush covers with 360 degree wraparound bumper
- Dual steel operating triggers. Negative pressure on/off switch.
- Thumb-operated safety switch
- 1" x 5" non-marking ball bearing wheels

#### Safety Features

- Quiet 66 dB operation. Meets GS42 standard.
- UL/CUL listed

#### Accessories

- Dust pickup Brute kit, splash guard, hexagonal weights, 20 lb. frame weights, 25 lb. horseshoe weights, 4 gallon solution tank, surface prep scraper, Orbitec diamond pad driver, weighted diamond pad driver brushes, pads and drivers, sandpaper drivers. 7 private label color. Details and part numbers on pages 38-39.



### Specifications

Model #	HP1513-180BRUTE	HP1515-180BRUTE	HP1517-180BRUTE	HP1520-180BRUTE
Part #	F0013-180CP	F0006-180CP	F0009-180CP	F0012-180CP
Machine Size	13 inch	15 inch	17 inch	20 inch
Pad Size	12 inch	14 inch	16 inch	19 inch
Pad Speed	165 RPM	165 RPM	165 RPM	165 RPM
Amp Draw	7.2 Amp	7.5 Amp	7.9 Amp	8.4 Amp

### All Sizes

Motor	1.5 HP, 180 frame, TEFC dual capacitor AC motor
Power	115-230V, 60 Hz power
Power Cord	50 ft., 12-3 SJTOW industrial power cord w/molded plug
Drive System	Triple-planetary XHD 11:1 helical-cut industrial gears
dB Rating	66 dB - Meets GS42 standard

Subject to Change Without Notice



All Steel Frame, Handles, Optional Weights



Permanently Lubricated Triple-Planetary Gears



Optional Dust Pickup System with Vacuum Connection



1.5 HP, 180 Frame Drives the Most Powerful Tools





## Stripping, Scrubbing, Resurfacing

The HAWK Pro is designed for the professional in mind. This severe duty machine handles the range of tasks with the 180-frame TEFC motor with hardened steel gears that drive rotary tools at 165 RPM.

The Pro includes two removable 25 lb. weights mounted on the brush cover, a convenient upper handle lock, 3" wider handle, a 4 gallon, no-spill solution tank, pad driver and splash guard.

### Power

- 1.5 HP, 180 frame, TEFC dual capacitor AC motor
- 115-230V, 60 Hz power. 50 ft. (12-3) SJTOW industrial power cord. 75 ft. (12-3) and 100 ft. (12-3) 2 piece cord available.

### Drive System

- Triple-planetary XHD 11:1 helical-cut industrial gears, case hardened with steel coupler, drive brushes and pads at 165 RPM

### Engineered Design

- All steel construction with welded, powder-coated frame
- One piece chrome, heavy-duty, extra wide ergonomic handle
- 13", 15", 17" and 20" brush covers with wraparound bumper
- Dual steel operating triggers. Thumb operated safety switch.
- Negative pressure on/off switch
- 1" x 5" non-marking ball bearing wheels
- Includes premium pad driver, 4 gallon solution tank and splash guard in private label colors
- Includes removable 80# weight set with mounting lock pins for extra down pressure and faster results

### Safety Features

- Quiet 60 dB operation. Meets GS42 standard.
- UL/CUL listed

### Accessories

- Dust pickup, surface prep scraper, Orbitec diamond pad driver, weighted diamond pad driver brushes, pads and drivers, sandpaper drivers. Details and part numbers pages 38-39.



## Specifications

Model #	HP1513-180PRO	HP1515-180PRO	HP1517-180PRO	HP1520-180PRO
Part Number	F0013-180PRO	F0006-180PRO	F0009-180PRO	F0012-180PRO
Machine Size	13 inch	15 inch	17 inch	20 inch
Pad Size	12 inch	14 inch	16 inch	19 inch
Pad Speed	165 RPM	165 RPM	165 RPM	165 RPM
Amp Draw	7.2 Amp	7.5 Amp	7.9 Amp	8.4 Amp

All Sizes	
Motor	1.5 HP, 180 frame, TEFC dual capacitor AC motor
Power	115-230V, 60 Hz power
Power Cord	50 ft. 12-3 SJTOW industrial power cord w/molded plug
Drive System	Triple-planetary XHD 11:1 helical-cut industrial gears
dB Rating	60 dB - Meets GS42 standard

Subject to Change Without Notice



Power to Drive Optional  
Orbitec Tools at 165 RPM



Includes Pad Driver &  
Splash Guard



Permanently Lubricated  
11:1 Triple-Planetary Gears



Upper Handle Lock is  
Easy to Access



## Stripping, Sanding, Carpet Care, Resurfacing

The TEXHD is built with the severe duty helical-cut gear drive, steel coupler, and a 180 frame TEFC black motor.

Use the TEXHD in the harshest conditions - dust, moisture, chemicals, and for sanding, screening, stone, and concrete work.

### Power

- 1.5 HP, 180 frame, TEFC dual capacitor AC motor
- 115-230V, 60 Hz power
- 50 ft. 12-3 SJTOW industrial power cord with molded plug

### Drive System

- Triple-planetary XHD 11:1 helical-cut industrial gears, case hardened with steel coupler, drives brushes and pads at 165 RPM

### Engineered Design

- All steel construction with welded, powder-coated frame
- One piece chrome, heavy-duty steel handle with variable position lock and vinyl grips
- 13", 15", 17" and 20" steel brush covers with 360 degree wraparound bumper
- Dual steel operating triggers. Negative pressure on/off switch.
- Thumb-operated safety switch
- 1" x 5" non-marking ball bearing wheels
- Optional 4 gallon solution tank

### Safety Features

- Quiet 66 dB operation. Meets GS42 standard.
- UL/CUL listed

### Accessories

- Dust pickup Brute kit, splash guard, hexagonal weights, 20 lb. frame weights, 25 lb. horseshoe weights, 4 gallon solution tank, surface prep scraper, Orbitec diamond pad driver, weighted diamond pad driver brushes, pads and drivers, sandpaper drivers. Details and part numbers pages 38-39.



## Specifications

Model #	HP1513-180TEXHD	HP1515-180TEXHD	HP1517-180TEXHD	HP1520-180TEXHD
Part Number	F0013-180	F0006-180	F0009-180	F0012-180
Machine Size	13 inch	15 inch	17 inch	20 inch
Pad Size	12 inch	14 inch	16 inch	19 inch
Pad Speed	165 RPM	165 RPM	165 RPM	165 RPM
Amp Draw	7.2 Amp	7.5 Amp	7.9 Amp	8.4 Amp
All Sizes				
Motor	1.5 HP, 180 frame, TEFC dual capacitor AC motor			
Power	115-230V, 60 Hz power			
Power Cord	50 ft. 12-3 SJTOW industrial power cord w/molded plug			
Drive System	Triple-planetary XHD 11:1 helical-cut industrial gears			
dB Rating	66 dB - Meets GS42 standard			

Subject to Change Without Notice



Dust Pickup System with Vacuum Connection Option



Add the 25 lb. Custom "U" Weights for Fast Results



7 Private Brand Colors



Power for Optional Grinder and Scraper Tools



## Stripping, Sanding, Carpet Care, Resurfacing



The HAWK Osprey is the all surface restoration machine for vinyl, stone, wood, concrete, ceramic tile and carpet. A 45 PSI solution pump, 4.5 gallon solution tank and the adjustable 60 degree spray nozzle control the precise amount of cleaning solution to the floor. The 1.5 HP, 180-frame TEFC motor delivers plenty of power for the largest jobs.

### Power

- 1.5 HP, 180 frame, TEFC dual capacitor AC motor
- 115-230V, 60 Hz power. 50 ft. (12-3) SJTOW cord with molded plug

### Drive System

- Triple-planetary XHD 11:1 helical-cut industrial gears, case hardened with steel coupler, drives brushes and pads at 165 RPM

### Engineered Design

- All steel construction with welded, powder-coated frame
- One piece chrome, heavy-duty steel handle with variable position lock and vinyl grips
- 13", 15", 17" and 20" brush covers with 360 degree bumper
- The 45 PSI solution pump is powered by the machine motor and controlled by the conveniently mounted handle switch
- A handle-mounted 4 gallon solution tank feeds the pump
- The solution spray valve on the pump delivers liquids to the floor at 0.25 gallon per minute
- Dual steel operating triggers. Negative pressure on/off switch.
- Thumb-operated safety switch
- Includes tufted pad driver and splash guard
- 1" x 5" non-marking ball bearing wheels

### Safety Features

- Quiet 66 dB operation. Meets GS42 standard. UL/CUL listed.

### Accessories

- Dust pickup, 25 lb. frame weights, surface prep scrapers, Orbitec diamond pad drivers, weighted diamond pad drivers, brushes, pads and drivers, sandpaper drivers. Details and part numbers on pages 38-39.



## Specifications

Model #	HP1513-1800SPREY	HP1515-1800SPREY	HP1517-1800SPREY	HP1520-1800SPREY
Part Number	F0013-OSP PREY	F0006-OSP PREY	F0009-OSP PREY	F0012-OSP PREY
Machine Size	13 inch	15 inch	17 inch	20 inch
Pad Size	12 inch	14 inch	16 inch	19 inch
Pad Speed	165 RPM	165 RPM	165 RPM	165 RPM
Amp Draw	7.2 Amp	7.5 Amp	7.9 Amp	8.4 Amp

## All Sizes

Motor	1.5 HP, 180 frame, TEFC dual capacitor AC motor
Power	115-230V, 60 Hz power
Power Cord	50 ft., (12-3) SJTOW industrial power cord w/molded plug
Drive System	Triple-planetary XHD 11:1 helical-cut industrial gears
Solution Pump	45 psi solution pump mounted on motor
dB Rating	66 dB - Meets GS42 standard

Subject to Change Without Notice



Welded Steel Frame,  
Handle & Brush Covers



45 PSI switch activated  
pump and solution tank



Includes Pad Driver &  
Splash Guard




7 Private  
Brand Colors





### Scrubbing, Stripping, Shampooing & Resurfacing

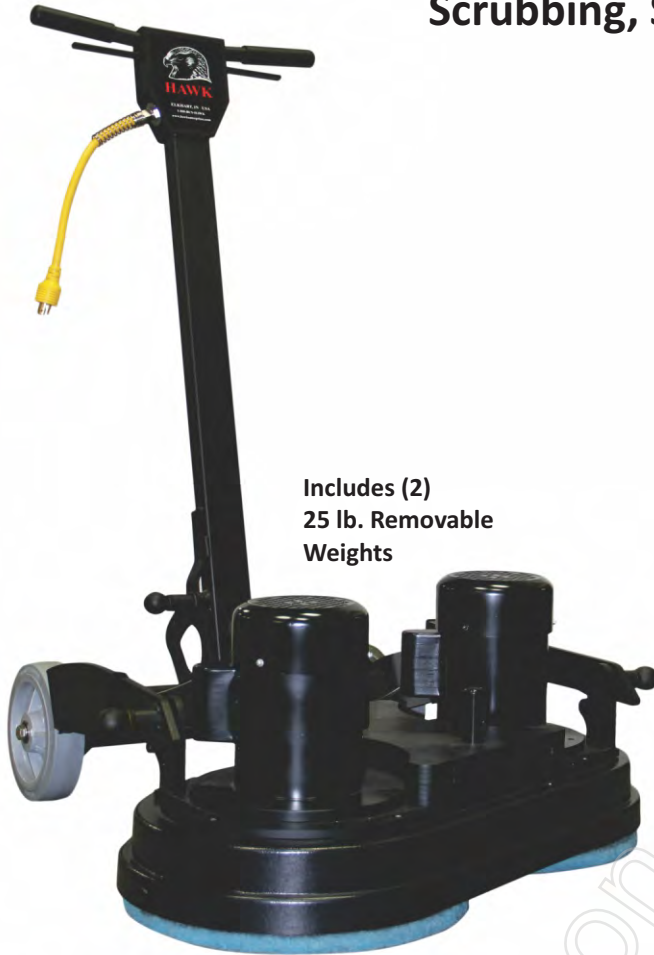

Includes (2)  
25 lb. Removable  
Weights

Big jobs are not a problem with the Hawk Wingspan™. The dual motor, wide area floor machine doesn't cost a fortune. Two 15" heads work in harmony to scrub, strip, or polish a 29" path quickly and with less effort. The unique design provides forward movement via HAWK Assist™ a first of it's kind in hand held scrubbers. Get behind the Wingspan™. It's just like flying.

#### Power

- (2) 1.0 HP, 56 frame, TEFC, dual capacitor AC motors
- 115-230V, 50/60 Hz power. 50 ft., 2-Part (12-3) SJTOW cord.

#### Drive System

- Triple-planetary XHD 11:1 helical cut industrial gears, case-hardened with steel coupler
- Gears drive brushes and pads at 165 RPM

#### Engineered Design

- Cleans a 29" path with two 15" pad drivers (included)
- Welded, powder-coated steel frame
- Includes (2) 25# removable weights
- One-piece powder-coated, heavy duty steel handle
- 4-position pin lock height adjustment. Vinyl grips.
- High density plastic molded brush shroud
- Thumb-operated safety switch. Negative pressure on/off switch. Dual steel operating triggers.
- 2"x 8" non-marking ball bearing wheels
- Includes EZ™ Glide transport cart.
- Optional 6 gallon solution tank. Optional vinyl splash guard.

#### Safety Features

- Quiet 66 dB operation. Meets GS42 standard.
- Built with UL listed components

#### Accessories

- 25 lb. Wingspan frame weights, 6 gallon solution tank, vinyl splash guard, 4 rotary brushes. Details and part numbers on pages 38-39.



### Specifications

Model #	Wingspan
Part #	F0061-29
Machine Size	29 inch
Pad Size	15 inch
Pad Speed	165 RPM
Amp Draw	7.2 Amp
Motor	(2) 1.0 HP, 56 Frame, TEFC, dual capacitor AC motors
Power	115-230V, 50/60 Hz power
Power Cord	50 ft., 2-part (12-3) SJTOW power cord w/ molded plug
Drive System	Triple-planetary XHD 11:1 helical-cut industrial gears
dB Rating	66 dB - Meets GS42 standard
Weight	185 lbs.

Subject to Change Without Notice



Offset Head  
Reaches Into Corners



2 Counter-Rotating  
Brushes / Pad Drivers



Includes Transport Cart



Disassembles for  
Transport & Storage



## Stripping, Scrubbing, Carpet Maintenance



The new Hawk Glide delivers up to twice the performance and superior safety over traditional floor machines. Our unique "Floating Head" handle carriage design provides 100% contact with the floor. The WD™ "Wheels Down" design steers the Glide in forward and backward movement - unlike the side-to-side movements of traditional rotary machines. Easy to learn. Easy to use.

### Power

- 1.5 HP, 66 frame, dual capacitor AC motor
- 115V, 60 Hz power, (230V optional)
- 50 ft., (14-3) STO power cord with molded plug

### Drive System

- **Glide** uses triple-planetary HD 10:1 helical-cut commercial gears. Drives brushes and pads at 175 RPM.
- **Glide XHD** (Extra Heavy-Duty) uses triple-planetary XHD 11:1 helical-cut industrial gears, case hardened with steel coupler. Drives brushes and pads at 165 RPM.

### Engineered Design

- Exclusive WD™ detachable handle carriage design
- All steel construction with welded frame
- Heavy-duty powder coated steel handle with 5-position pin lock and vinyl grips
- 17" and 20" metal brush cover. 360 degree wraparound bumper.
- Dual steel operating triggers
- Negative pressure on/off switch. Thumb-operated safety switch.
- 2" x 5" non-marking ball bearing wheels

### Safety Features

- Quiet 66 dB operation. Meets GS42 standard.
- Built with UL approved components

### Accessories

- Dust pickup Glide kit, splash guard, 4.5 gallon solution tank, surface prep scraper, Orbitec diamond pad driver, weighted diamond pad driver brushes, pads and drivers, sandpaper drivers. 7 private label colors. Details and part numbers on pages 38-39.



## Specifications

Model	GLIDE 17	GLIDE 17XHD	GLIDE 20	GLIDE 20XHD
Part #	F0091-17	F0091-17XHD	F0091-20	F0012-20XHD
Machine Size	17"	17"	20"	20"
Pad Size	16"	16"	19"	19"
Pad Speed	175 RPM	165 RPM	175 RPM	165 RPM
Gear Box	10:1	11:1	10:1	11:1
Amp Draw	6.7 Amp	7.1 Amp	6.9 Amp	7.3 Amp

## All Models

Motor	1.5 HP, 66 frame dual capacitor AC motor
Power	115V, 60 Hz power, (230V optional)
Power Cord	50 ft., (14-3) STO power cord with molded plug
dB Rating	66 dB - Meets GS42 standard

Subject to Change Without Notice




Optional Dust Control Ring  
Connects to Tank Vac



Available with 45 PSI  
Solution Sprayer



Glide XHD Has Chromed  
Motor w/ 11:1 Gear Box



5-Position Pin Lock Handle.  
All Steel Construction.



## HAWK Glide Freedom 2-Speed Dual-Speed WD™ Floor Machine

### Stripping, Scrubbing, Carpet Maintenance

The Hawk Glide 2-Speed delivers twice the performance and superior safety over traditional floor machines. Our unique "Floating Head" handle carriage design provides 100% contact with the floor while incorporating forward and backward movement - unlike the side-to-side swing of traditional rotary machines. Scrub at 175 RPM (Standard) or 165 RPM (XHD). Polish at 320 or 350 RPM.

#### Power

- 1.5 HP, 66 frame, rectified 2-speed AC motor.
- 115V, 60 Hz power, (230V optional). 50 ft. (14-3) SJT power cord
- Hi/Low speed switch is located on the motor

#### Drive System

- **Glide** uses triple-planetary HD 10:1 helical-cut commercial gears to drive pads at 175 or 350 RPM
- **Glide XHD** triple-planetary XHD 11:1 helical-cut industrial gears with case hardened steel coupler drives pads at 165 or 320 RPM

#### Engineered Design

- Exclusive WD™ detachable handle carriage design
- All steel construction with welded frame heavy-duty powder coated steel handle with 5-position pin lock and vinyl grips
- 17" and 20" steel brush covers with full wraparound bumper
- Dual steel operating triggers. Negative pressure on/off switch.
- Thumb-operated safety switch
- 2" x 5" non-marking ball bearing wheels

#### Safety Features

- Quiet 62 dB (low speed), 69 dB (high speed) operation. Meets GS42 standard.
- Built with UL Listed components

#### Accessories

- Dust pickup Glide kit, splash guard, 4.5 gallon solution tank, surface prep scraper, Orbitec diamond pad driver, weighted diamond pad drivers 5 brushes, pads and drivers, sandpaper drivers. Details and part numbers pages 38-39.



### Specifications

Model	GLIDE 17-2S	GLIDE 17-2SXHD	GLIDE 20-2S	GLIDE 20-2SXHD
Part #	F0091-17-2S	F0091-17-2SXHD	F0091-20-2S	F0091-20-2SXHD
Machine Size	17"	17"	20"	20"
Pad Size	16"	16"	19"	19"
Pad Speed	175/350 RPM	165/320 RPM	175/350 RPM	165/320 RPM
Gear Box	10:1	11:1	10:1	11:1
Amp Draw (Low/High Speed)	8.5/9.1 Amp	8.5/9.1 Amp	9.2/9.6 Amp	9.2/9.6 Amp

### All Models

Motor - Glide	66 frame, 1.5 HP rectified 2-speed AC motor
Power	115V, 60 Hz. (230V optional)
Power Cord	50 ft. 14-3 SJT industrial power cord w/molded plug
dB Rating	62 dB (low speed) - 69 dB (high speed) Meets GS42 standard


Subject to Change Without Notice




XHD Uses 11:1 Triple Planetary Gears



Optional Dust Control Ring Connects to Tank Vacuum



2-Speed Motor with Hi/Low Switch



5-Position Pin Lock Handle All Steel Construction





(4) 20#  
Weights  
Included



### Stripping, Scrubbing, Resurfacing

Merlin takes advantage of innovative engineering and modern design to set new records in production and user safety. Our unique "Floating Head" handle carriage design provides 100% contact with the floor. The WD™ "Wheels Down" design steers the Merlin in forward and backward movement - unlike the side-to-side movements of traditional rotary machines. Easy to learn. Easy to use.

#### Power

- 1.5 HP, 180 frame, TEFC dual capacitor AC motor
- 115-230V, 60 Hz power. 50 ft. 2-part, (12-3) SJTOW power cord

#### Drive System

- Triple-planetary XHD 11:1 helical-cut industrial gears, with case hardened steel coupler drives brushes and pads at 165 RPM

#### Engineered Design

- All steel construction with welded, powder-coated frame
- Powder-coated steel handle with 5-position pin lock
- The severe-duty motor guard mounts on the motor to protect from impact damage
- 17" and 20" steel brush covers with 360 degree wraparound bumper
- Thumb-operated safety switch. Dual steel operating triggers.
- Negative pressure on/off switch
- 2" x 8" non-marking load bearing, ball bearing wheels
- Includes 80 lb. weight set

#### Safety Features

- Quiet 66 dB operation. Meets GS42 standard.
- UL/CUL listed

#### Accessories

- Dust pickup Brute kit, splash guard, hexagonal weights, 20 lb. frame weights, 25 lb. horseshoe weights, 4.5 and 6 gallon solution tank, surface prep scraper, Orbitec diamond pad driver, weighted diamond pad driver brushes, pads and drivers, sandpaper drivers. Details and part numbers pages 38-39.

### Specifications

Model #	HP1517-MER	HP1520-MER
Part #	F0040-17 -1.5TE	F0040-20-1.5TE
Machine Size	17 inch	20 inch
Pad Size	16 inch	19 inch
Pad Speed	165 RPM	165 RPM
Amp Draw	7.9	8.5

All Sizes	
Motor	1.5 HP, 180 frame, TEFC dual capacitor AC motor
Drive System	Triple-Planetary XHD 11:1 helical cut industrial gears
Power	115-230V, 60 Hz power
Power Cord	50 ft. 2-part, (12-3) SJTOW industrial power cord
dB Rating	66 dB - Meets GS42 standard

Subject to Change Without Notice



5-Position Pin Lock Handle  
All Steel Construction



80 lb. Weights Mounts on  
Apron with Locking Pins



Permanently Lubricated  
11:1 Triple Planetary Gears



Floating Head Frame



### Stripping, Scrubbing, Restoration



The Merlin 2-Speed takes advantage of innovative engineering and modern design to set new records in production and user safety. Our unique "Floating Head" handle carriage design provides 100% contact with the floor. The WD™ "Wheels Down" design steers the Merlin in forward and backward movement - unlike the side-to-side movements of traditional rotary machines. Strip and scrub floors at 165 RPM. Buff and polish at 300.

#### Power

- 1.5 HP, 66 frame, DC rectified 2-speed motor
- Hi-Lo 2-speed toggle switch on motor
- 115V, 50/60 Hz power, (230V optional)
- 50 ft., (12-3) SJTOW 2-piece power cord with molded plug

#### Drive System

- Triple planetary XHD 11:1 helical cut industrial gears, case hardened with steel coupler drives brushes at 165 and 300 RPM

#### Engineered Design

- WD™ handle assemblies and disassembles in 60 seconds, without tools, for transport and storage
- All steel construction with welded "Floating Head" frame
- Includes removable 80 lb. weight set
- Powder-coated 5-position pin-lock handle with vinyl grips
- 17" and 20" brush covers with 360 degree wrap-around bumper
- Thumb-operated safety switch. Negative pressure on/off switch.
- Dual steel operating triggers
- 2" x 8" non-marking load bearing, ball-bearing wheels

#### Safety Features

- Quiet operation – 62 dB (low speed), 69 dB (high speed). Meets GS42 standard. UL / CUL Listed.

#### Accessories

- Dust pickup Brute kit, splash guards, 4.5 and 6 gallon solution tank, surface prep scraper, Orbitec diamond pad driver, weighted diamond pad drivers 5 brushes, pads and drivers, sandpaper drivers. Details and part numbers pages on 38-39.



### Specifications

Model #	HP1517-MER-2SXHD	HP1520-MER-2SXHD
Part #	F0040-17-1.5TE-2S	F0040-20-1.5TE-2S
Machine Size	17 inch	20 inch
Pad Size	16 inch	19 inch
Pad Speed	165 / 300 RPM	165 / 300 RPM
Amp Draw (165/300)	8.5 / 9.1	9.2 / 9.6
All Sizes		
Motor	1.5 HP, 66 frame, DC rectified 2-speed motor	
Power	115V, 50/60 Hz power, (230V optional)	
Drive System	Triple-planetary XHD 11:1 helical cut industrial gears	
Power Cord	50 ft., 12-3 SJTOW power cord with molded plug	
dB Rating	62 dB (165 RPM) - 69 dB (300 RPM) operation Meets GS42 standard	

Subject to Change Without Notice



5-Position Pin Lock Handle  
All Steel Construction



Optional Grinder and  
Scraper Tools



2-Speed Motor with  
Hi/Lo Switch



Optional 6 Gallon  
Solution Tank



### Dry Stripping, Scrubbing, Stripping

The G2 Raptor with the revolutionary rectangular floating head is easy to maneuver with less vibration and fatigue than other orbiting brands. The G2 Raptor works faster than rotary floor machines, easily reaching into corners and along baseboards.

The G2 Raptor can strip large areas of floor finish without chemicals. It is excellent for sanding, scrubbing and stone polishing. Easy to learn. Easy to use.

#### Power

- 1.5 HP, 180 frame, TEFC dual capacitor AC motor
- 115-230V, 60 Hz power
- 50 ft., 12-3 SJTOW industrial power cord with molded plug

#### Drive System

- Essentric balanced orbital drive works at 1740 RPM

#### Engineered Design

- Four 2" vibration isolators
- One-piece industrial, powder-coated, heavy-duty welded steel frame and chromed steel handle for optimum durability
- Variable position handle lock with transport lock
- Thumb operated safety switch
- Negative pressure on/off switch
- Dual steel operating triggers
- 2" x 8" non-marking, ball bearing wheels
- Optional dust skirt and vacuum assembly kit

#### Safety

- Quiet 66 dB operation. Meets GS42 standard.
- UL/CUL listed

#### Accessories

- Dust skirt and vacuum assembly kit, 2.5 gallon solution tank, (4) abrasive strengths 20"x14" orbital pads and 4 pad starter kit, 20"x14" abrasive screens. Details and part numbers on page 40.

### Specifications

Model	RAPTOR 2014-G2
Part Number	F-RAP2014-G2
Pad Size	20" x 14"
Pad Speed	1740 RPM
Power Source	115-230V, 60 Hz power
Motor	1.5 HP, 180 frame, TEFC dual capacitor AC motor
Amp Draw	9 Amp
Power Cord	50 ft., 12-3 SJTOW industrial cord with molded plug
Weight	194 lbs. (0.657 lbs/in <sup>2</sup> )
Drive System	Essentric balanced orbital drive
Vibration Isolators	(4) Industrial 2" vibration isolators
dB Rating	66 dB - Meets GS42 standard

Subject to Change Without Notice



Dual Vacuum Pickups



Optional Dust Control Kit



Industrial 2" Vibration Isolators



8" Wheels for Easy Transport





### Dry Stripping, Scrubbing, Stripping

The TigerHawk 1410 revolutionary rectangular floating head is easy to maneuver with less vibration and fatigue than other orbiting brands. The WD™ handle design assures 100% pad contact with the floor. The 1410 works three times faster than rotary floor machines, easily reaching into corners and along baseboards. Add the optional 2.5 gallon solution tank for even greater productivity.

The TigerHawk 1410 can strip large areas of floor finish without chemicals. The 1410 is excellent for sanding, scrubbing and stone polishing. Easy to learn. Easy to use.

#### Power

- 0.5 HP, 56 frame, TEFC single capacitor AC motor
- 115V, 50/60 Hz power
- 50 ft., (14-3) SJTOW power cord with molded plug

#### Drive System

- Essentric balanced orbital drive works at 1725 RPM

#### Engineered Design

- Dual vibration isolation system
- 5-position pin lock handle height adjustment and vinyl grips
- Built with vacuum port
- Thumb-operated safety switch
- Dual steel operating triggers
- Negative pressure on/off switch
- 1" x 5" non-marking ball-bearing wheels

#### Safety Features

- Quiet 66 dB operation. Meets GS42 standard.
- Built with UL listed components

#### Accessories

- Dust skirt and vacuum assembly kit, 2.5 gallon solution tank, (4) abrasive strength 10"x14" orbital pads and 4 pad starter kit, 10"x14" abrasive screens. Details and part numbers on pages 40.



### Specifications

Model #	TH-1410
Part #	F-TIGER1410
Pad Size	14" x 10"
Pad Speed	1725 RPM
Pad Pressure	0.56 lbs./sq. in.
Motor	0.5 HP, 56 frame, TEFC single capacitor AC motor
Power Source	115V, 50/60 Hz
Power Cord	50 ft., (14-3) SJTOW power cord w/molded plug
Amp Draw	8.3 Amp
Drive System	Essentric balanced orbital drive
Vibration Isolators	(4) 1.25" isolaters
dB Rating	66 dB - Meets GS42 standard


Subject to Change Without Notice



Floating Head Frame



Optional Full  
Wraparound Dust Skirt



(4) Rubber Vibration  
Isolators



Welded Powder-Coated  
Steel Construction



### Dry Stripping, Scrubbing, Stripping

The TigerHawk 2014 revolutionary rectangular floating head is easy to maneuver with less vibration, noise and fatigue than other orbiting brands. The WD™ handle design assures 100% pad contact with the floor. The 2014 works three times faster than rotary floor machines, easily reaching into corners and along baseboards. Add a handle mounted vacuum tank for dust control. Add the 4 gallon solution tank for wet scrubbing. The TigerHawk 2014 can strip large areas of floor finish with or without chemicals. Use for sanding, scrubbing and stone stripping. Easy to learn. Easy to use.

#### Power

- 1.5 HP, 180 frame, TEFC dual capacitor AC motor
- 115-230V, 60 Hz power
- 50 ft. 2-part (12-3) SJTOW industrial power cord with molded plug

#### Drive System

- Essentric balanced orbital drive works at 1725 RPM

#### Engineered Design

- Dual vibration isolation system
- The WD™ powder-coated, heavy-duty steel handle is easy to remove
- 5-position pin lock handle adjustment and vinyl grips
- Includes severe-duty motor guard - protects the motor from impact damage
- 2" x 8" non-marking ball bearing wheels.
- Thumb-operated safety switch. Dual steel operating triggers.
- Negative pressure on/off switch.
- 2014 drive plate is built with a vacuum port. The vacuum "V" model connects here with 6 quart tank vacuum and dust skirt.
- Spray "SP" model adds motor-mounted solution pump and handle-mounted 4.5 gallon solution tank

#### Safety Features

- Quiet 66 dB operation. Meets GS42 standard. UL/CUL listed.

#### Accessories

- Full wraparound dust skirt, 4.5 gallon solution tank, (4) abrasive strengths 20"x14" orbital pads and 4 pad starter kit, and 20"x14" abrasive screens. Details and part numbers on pages 40.

### Specifications

Model	TH-2014	TH2014-SP	TH2014-V
Part Number	F-TIGER2014	F-TIGER 2014-SP	F-TIGER2014-V
Pad Size	20" x 14"	20" x 14"	20" x 14"
Configuration	Standard	w/ Solution Pump & 4.5 Gal. Solution Tank	w/ 6 Qt. Tank Vacuum & Skirt
Pad Speed	1725 RPM	1725 RPM	1725 RPM
Amp Draw	7.1 Amp	7.1 Amp	11.8 Amp
Weight	250 lbs.	259 lbs.	269 lbs.
Pad Pressure	0.89 lbs/in <sup>2</sup>	0.92lbs/in <sup>2</sup>	0.96 lbs/in <sup>2</sup>

### All Models

Motor	1.5 HP, 180 frame, TEFC dual capacitor AC motor
Power Source	115-230V, 60 Hz power
Power Cord	50 ft., 2-Part (12-3) SJTOW industrial power cord w/molded plug
Drive System	Essentric balanced orbital drive
Vibration Isolators	(6) primary, (8) secondary isolaters

Subject to Change Without Notice



Works Along Baseboards and Into Corners



TH2014-SP Model Adds the Spray Pump and Solution Tank



Steel Frame with Rear Vacuum Port



TH2014-V Model Adds the 6 Quart Tank Vac, Dust Skirt and Hoses



## Dry Stripping, Scrubbing, Stripping

The TigerHawk 2814 with the revolutionary rectangular floating head is easy to maneuver, with less vibration, sound and fatigue than other orbiting brands. The WD™ handle design assures 100% pad contact with the floor. The 2814 works three times faster than rotary floor machines, easily reaching into corners and along baseboards. Use the spray system model or active vacuum system model for even greater productivity.

The TigerHawk 2814 can strip large areas of floor finish with or without chemicals. The 2814 is excellent for sanding, scrubbing and stone stripping.

### Power

- 1.5 HP, 180 frame, TEFC dual capacitor AC motor
- 115-230V, 60 Hz power
- 50 ft., 2-part, (12-3) SJTOW industrial power cord with molded plug

### Drive System

- Essentric balanced orbital drive works at 1725 RPM

### Engineered Design

- Dual vibration isolation system
- The WD™ powder-coated, heavy-duty steel handle removes easily
- The severe-duty guard protects from motor from impact damage
- 5-position pin lock handle adjustment and vinyl grips
- Thumb-operated safety switch. Dual steel operating triggers.
- Includes full wraparound dust skirt
- 2" x 8" non-marking ball bearing wheels
- The "V" model is built with two vacuum ports for use with the 6.5 quart tank vacuum
- The "SP" model adds a 45 PSI spray pump and 4.5 gallon solution tank
- Includes easy to move transport cart

### Safety Features

- Quiet 66 dB operation. Meets GS42 standard.
- UL/CUL listed

### Accessories

- Wraparound dust apron, vacuum assembly kit, 4.5 gallon solution tank, (4) abrasive strengths 28"x14" orbital pads and 4 pad starter kit, 28"x14" abrasive screens. Details and part numbers on page 40.



## Specifications

Model	TH-2814	TH2814-SP	TH2814-V
Part Number	F-TIGER2814	F-TIGER 2814-SP	F-TIGER2814-V
Pad Size	28" x 14"	28" x 14"	28" x 14"
Configuraation	Standard	w/ Solution Pump & 4 Gal. Solution ank	w/ 6.5 Qt. Tank Vacuum & Skirt
Pad Speed	1725 RPM	1725 RPM	1725 RPM
Amp Draw	7.8 Amp	7.8 Amp	12.5 Amp
Weight	305 lbs.	314 lbs.	324 lbs.
Pad Pressure	0.78 lbs/in <sup>2</sup>	0.80 lbs/in <sup>2</sup>	0.82 lbs/in <sup>2</sup>

## All Models

Motor	1.5 HP, 180 frame, TEFC dual capacitor AC motor
Power Source	115-230V, 60 Hz power
Power Cord	50 ft., 2- part (12-3) SJTOW industrial power cord w/molded plug
Drive System	Essentric balanced orbital drive
Vibration Isol tors	(6) primary, (8) secondary isolaters
dB Rating	66 dB - Meets GS42 standard.

Subject to Change Without Notice



Includes Full Wrap-Around Dust Skirt



Includes Transport Cart



Frame is Built with Dual Vacuum Ports for Use on TH2814-V



TH2814-SP Adds a Sprayer Pump & 4.5 Gallon Solution Pump





### Surface Preparation, Scrubbing, Refinishing



The Red Tail is the "go-to" tool for surface prep and cleaning any washable hard surface. Our unique WD™ Detachable Handle provides 100% wheel contact on the floor for perfect control. Clean along baseboards and deep into corners with 20" x 14" pads, without needing to bend and scrape. The Red Tail strips large areas of floor finish without chemicals, making it safer for all. Excellent for sanding, scrubbing and stone polishing. Easy to learn. Easy to use.

#### Power

- 1.0 HP, 56 frame, TEFC, dual capacitor AC motor
- 115-230V, 50/60 Hz power
- 50 ft. 14-3 SJT power cord with molded plug

#### Drive System

- Essentric balanced orbital drive works at 1725 RPM

#### Engineering Design

- Hawk exclusive orbital technology reduces vibration and makes scrubbing easier with less fatigue
- One-piece industrial powder-coated heavy-duty steel handle with comfortable vinyl grip. Welded steel frame.
- WD™ handle is easily removed for transport and storage
- 5 position pin-lock handle adjustment
- Thumb operated safety switch. Dual steel operating triggers.
- Negative pressure on/off switch
- 2" x 6" non-marking ball bearing wheels

#### Safety Features

- Quiet 66 dB operation. Meets GS42 standard.
- Built with UL approved components

#### Accessories

- Full wraparound dust skirt, 4 gallon solution tank, (4) abrasive strengths 20"x14" orbital pads and 4 pad starter kit, 20"x14" abrasive screens. Details and part numbers on page 41.



### Specifications

Model#	REDTAIL 2014
Part#	F-REDTAIL-2014
Pad Size	20" x 14"
Pad Speed	1725 RPM
Weight	112 lbs.
Pad Pressure	0.4 lbs/in <sup>2</sup>
Motor	1.0 HP, 56 frame, TEFC, dual capacitor AC motor
Power Source	115-230V, 50/60 Hz power
Power Cord	50 ft. 14-3 SJT power cord with molded plug
Amp Draw	7.8 Amp
Drive System	Essentric balanced orbital drive
Vibration Isolator	(4) primary, (6) secondary
dB Rating	66 - Meets GS42 standard.

Subject to Change Without Notice



Orbiting Pads and WD™  
Handle - Works Tight Spaces



Unique Vibration  
Damping Design



Disassembles for  
Easy Transport & Storage



Add the Optional  
Dust Control Kit



## Burnishing & Refinishing

The Hawk High Speed is known for its balance, durability, and value. Hawk offers the largest selection of burnishers. Available in 13", 15", 17" & 20". Choose your speed - 1500, 1800 or 2000 RPM. The 17" and 20" Active Dust Control DC models include a dust ring and filter; the perfect addition to any Green Cleaning program.

### Power

- 1.5 HP, 66 frame, DC rectified motor. 115V, 60 Hz power.
- 50 ft. 14-3 STO industrial power cord with molded plug

### Drive System

- Multi V-Belt drives pads at 1500, 1800 and 2000 RPM

### Engineering Design

- Welded steel frame. One piece chrome heavy-duty steel handle with variable position positive lock.
- 13", 15", 17" and 20" aprons with full wraparound bumper
- Thumb operated safety switch. Negative pressure on/off switch.
- Dual steel operating triggers
- 1" x 5" non-marking ball-bearing wheels
- Includes flexible pad holder with pad centering clamp

### Safety Features

- Quiet operation - 69 dB (Standard), 62 dB (Dust Control). Meets GS42 standard.
- UL/CUL listed (1500 rpm model). All UL listed components.

### Accessories

- Splash guards, dust filter (A0009-2), white polishing pads, hogs hair burnishing pads, dust control ring on 17", 20" models. 7 private label colors. Details and part numbers on pages 41.

## Specifications

Machine Pad Size	13" Standard 13"	15" Standard 15"	17" Standard 17"	17" Dust Control 16"	20" Standard 20"	20" Dust Control 19"
Speed	1500 RPM					
Model #	HP1513-HSB	HP1515-HBS	HP1517-HBS	HP1517-1500HSBDC	HP1520-HSB	HP1520-1500HSBDC
Part #	F1500-13	F1500-15	F1500-17	F1500-17DC	F1500-20	F1500-20DC
Amp Draw	9.1 Amp	9.6 Amp	13.0 Amp	12.2 Amp	13.8 Amp	13.1 Amp
Speed	1800 RPM					
Model #	HP1513-1800	HP1515-1800	HP1517-1800	HP1517-1800DC	HP1520-1800	HP1520-1800DC
Part #	F1800-13	F1800-15	F1800-17	F1800-17DC	F1800-20	F1800-20DC
Amp Draw	9.5 Amp	9.9 Amp	13.9 Amp	13.2 Amp	14.6 Amp	13.6 Amp
Speed	2000 RPM					
Model #	HP1513-2000	HP1515-2000	HP1517-2000	HP1517-2000DC	HP1520-2000	HP1520-2000DC
Part #	F2000-13	F2000-15	F2000-17	F2000-17DC	F2000-20	F2000-20DC
Amp Draw	10.0 Amp	10.8 Amp	14.9 Amp	13.9 Amp	16.4 Amp	14.8 Amp

## All Models

Motor	1.5 HP, 66 frame DC rectified motor					
Power	115V, 60 Hz power. 50 ft., 14-3 SJT industrial power cord with molded plug					
Belt Drive	Multi-V belt drive					
dB Rating	69 dB	69 dB	69 dB	62 dB	69 dB	62 dB
Machine Weight (all)	84 lbs.	86 lbs.	88 lbs.	90 lbs.	90 lbs.	92 lbs.



## Burnishing & Refinishing



The Hawk High-Speed Burnisher with AC motor is a balanced force of polishing power. The models are built with a durable 1.5 HP Totally Enclosed Fan Cooled (TEFC) motor that requires no maintenance. The enclosure protects the inner working of the motor from dust and moisture. The perfect addition to any Green Cleaning program.

### Power

- 1.5 HP, 56 frame, TEFC dual capacitor AC motor
- 115V, 60 Hz power. 50 ft., (14-3) STO industrial power cord

### Drive System

- Multi V-Belt drives pads at 1000, 1250 or 1500 RPM

### Engineering Design

- Welded steel frame. One-piece chrome handle with variable position positive lock handle and vinyl grips
- 13", 15", 17" and 20" steel pad cover. 360 degree wraparound bumper
- Thumb-operated safety switch
- Negative pressure on/off switch
- Dual steel operating triggers
- 1" x 5" non-marking wheels
- 17" and 20" Dust Control models include a dust ring and filter.
- Includes flexible pad holder with pad centering clamp

### Safety Features

- Quiet operation - 58 dB (Standard), 53 dB (Dust Control). Meets GS42 standard.
- Built with UL listed components

### Accessories

- Splash guards, dust filter (A0009-2), white polishing pads, hogs hair burnishing pads. Details and part numbers on pages 41.



## Specifications

Machine Pad Size	13" Standard 13"	15" Standard 15"	17" Standard 17"	17" Dust Control 16"	20" Standard 20"	20" Dust Control 19"
Speed	1000 RPM					
Model #	HCF1513-1000	HCF1515-1000	HCF1517-1000	HCF1517-1000DC	HCF1520-1000	HCF1520-1000DC
Part #	F1000-13TE	F1000-15TE	F1000-17TE	F1000-20TE	F1000-17TE	F1000-20TEDC
Amp Draw	10.0 Amp	11.2 Amp	12.4 Amp	11.6 Amp	13.5 Amp	12.4 Amp
Speed	1250 RPM					
Model #	HCF1513-1250	HCF1515-1250	HCF1517-1250	HCF1517-1250DC	HCF1520-1250	HCF1520-1250DC
Part #	F1250-13TE	F1250-15TE	F1250-17TE	F1250-20TE	F1250-17TE	F1250-20TEDC
Amp Draw	10.0 Amp	11.2 Amp	12.4 Amp	11.6 Amp	13.5 Amp	12.4 Amp
Speed	1500 RPM					
Model #	HCF1513-1500	HCF1515-1500	HCF1517-1500	HCF1517-1500	-	-
Part #	F1500-13TE	F1500-15TE	F1500-17TE	F1500-20TE	-	-
Amp Draw	10.3 Amp	11.7 Amp	13.0 Amp	12.3 Amp	-	-

## All Models

Motor	1.5 HP, 56 frame, TEFC dual capacitor AC motor					
Power	115V, 60 Hz power. 50 ft., 14-3 STO industrial power cord with molded plug					
Belt Drive	Multi-V belt drive					
dB Rating	58 dB	58 dB	58 dB	53 dB	58 dB	53dB
Machine Weight (all)	84 lbs.	86 lbs.	88 lbs.	88 lbs.	90 lbs.	90 lbs.

Subject to Change Without Notice





## Burnishing & Refinishing

The Hawk Centerfold High-Speed DC Burnisher with DC motor is renowned for its balance, durability and value. The non-locking handle allows the head to keep constant pad pressure assuring a steady amp draw and consistent floor shine. The fold-up handle is designed for easy transport and for storage in tight spaces.

Hawk offers the largest selection of burnishers. 13", 15", 17" & 20" sizes. 1500, 1800 and 2000 RPM speeds. The 17" and 20" Active Dust Control models include a dust ring and filter, the perfect addition to every Green Cleaning program.

### Power

- 1.5 HP, 66 frame, DC rectified motor
- 115V, 60 Hz power. (230V optional).
- 50 ft., 14-3 SJT industrial power cord with molded plug

### Drive System

- Multi V-Belt drives pads at 1500, 1800 or 2000 RPM

### Engineered Design

- Welded, heavy gauge industrial powder coated steel construction
- Variable position handle with vinyl grips
- 13", 15", 17" and 20" pad cover. 360 degree wraparound bumper.
- Dust control on 17" and 20" models
- Thumb operated safety switch
- Negative pressure on/off switch
- Dual steel operating triggers
- 1" x 5" non-marking ball bearing wheels
- Includes flexible pad holder with pad centering clamp

### Safety Features

- Quiet operation - 69 dB (Standard), 62 dB (Dust Control). Meets GS42 standard. UL/CUL listed



## Specifications

Machine Pad Size	13" Standard 13"	15" Standard 15"	17" Standard 17"	17" Dust Control 16"	20" Standard 20"	20" Dust Control 19"
Speed	1500 RPM					
Model #	HCF1513-1500	HCF1515-1500	HCF1517-1500	HCF1517-1500DC	HCF1520-1520	HCF1520-1520DC
Part #	F1500-13CF	F1500-15CF	F1500-17CF	F1500-17CFDC	F1500-20CF	F1500-20CFDC
Amp Draw	11.4 Amp	11.9 Amp	12.6 Amp	9.8 Amp	13.2 Amp	10.2 Amp
Speed	1800 RPM					
Model #	HCF1513-1800	HCF1515-1800	HCF1517-1800	HCF1517-1800DC	HCF1520-1800	HCF1520-1800DC
Part #	F1800-13CF	F1800-15CF	F1800-17CF	F1800-17CFDC	F1800-20CF	F1800-20CFDC
Amp Draw	11.7 Amp	12.3 Amp	13.2 Amp	10.1 Amp	13.9 Amp	10.7 Amp
Speed	2000 RPM					
Model #	HCF1513-2000	HCF1515-2000	HCF1517-2000	HCF1517-2000DC	HCF1520-2000	HCF1520-2000DC
Part #	F2000-13CF	F2000-15CF	F2000-17CF	F2000-17CFDC	F2000-20CF	F2000-20CFDC
Amp Draw	11.8 Amp	12.4 Amp	13.8 Amp	11.1 Amp	14.8 Amp	11.8 Amp

## All Models

Motor	1.5 HP, 66 frame, DC rectified motor					
Power	115V, 60 Hz power. 50 ft., 14-3 SJT industrial power cord with molded plug					
Belt Drive	Multi-V belt drive					
dB Rating	69 dB	69 dB	69 dB	62 dB	69 dB	62 dB
Machine Weight	84 lbs.	86 lbs.	88 lbs.	90 lbs.	90 lbs.	92 lbs.



### Burnishing & Restoration



The Hawk Centerfold High-Speed Burnisher with AC motor is renowned for its balance, durability and value. It is built with a durable 1.5 HP Totally Enclosed Fan Cooled (TEFC) motor that requires no maintenance and the enclosure protects the inner working from dust and moisture. The non-locking handle allows the head to keep constant pad pressure, assuring a steady amp draw and consistent floor shine. The fold-up handle is designed for easy transport and for storage in tight spaces.

Hawk offers the machines in 13", 15", 17" & 20" sizes and 1000 & 1500 RPM speeds. Select the Active Dust Control model for your Green Cleaning program. Use the optional 75 ft. power cord for larger areas.

#### Power

- 1.5 HP, 56 frame, TEFC dual capacitor AC motor
- 115V, 60 Hz power. 50 ft. 14-3 SJT industrial power cord

#### Drive System

- Multi V-Belt drives pads at 1000 or 1500 RPM

#### Engineered Design

- Welded powder-coated steel frame
- Variable position handle with vinyl grips
- 13", 15", 17" and 20" pad cover aprons with wrap-around bumper
- Thumb operated safety switch
- Negative pressure on/off switch. Dual steel operating triggers.
- 1" x 5" non-marking ball bearing wheels
- Includes flexible pad holder with pad centering clamp

#### Safety Features

- Quiet operation - 58 dB (Standard), 51 dB (with Dust Control). Meets GS42 standard.
- Built with UL listed components

#### Accessories

- Splash guards, dust filter A0009-2, white polishing pads, hogs hair burnishing pads. Details and part numbers on pages 41.



### Specifications

Machine Pad Size	13" Standard 13"	15" Standard 15"	17" Standard 17"	17" Dust Control 16"	20" Standard 20"	20" Dust Control 19"
Speed	1000 RPM					
Model #	HCF1513-1000TE	HCF1515-1000TE	HCF1517-1000TE	HCF1517-1000TEDC	HCF1520-1000	HCF1520-1000TEDC
Part #	F1000-13TECF	F1000-15TECF	F1000-17TECF	F1000-17TECFDC	F1000-20TECF	F1000-20TECFDC
Amp Draw	10.0 Amp	11.2 Amp	12.4 Amp	11.6 Amp	13.5 Amp	12.4 Amp
Speed	1500 RPM					
Model #	HCF1513-1500TE	HCF1515-1500TE	HCF1517-1500TE	HCF1517-1500TEDC	-	-
Part #	F1500-13TECF	F1500-15TECF	F1500-17TECF	F1500-20TECFDC	-	-
Amp Draw	10.3 Amp	11.7 Amp	13.0 Amp	12.3 Amp	-	-
<b>All Models</b>						
Motor	1.5 HP, 56 frame, TEFC dual capacitor AC motor					
Power	115V, 60 Hz power. (230V optional). 50 ft. 14-3 SJT industrial power cord with molded plug					
Power Cord						
Belt Drive	Multi-V belt drive					
dB Rating	58 dB	58 dB	58 dB	53 dB	58 dB	53dB
Machine Weight (all)	84 lbs.	86 lbs.	88 lbs.	88 lbs.	90 lbs.	90 lbs.

Subject to Change Without Notice



### Stripping, Scrubbing, Buffing



The BlackHawk has been redesigned for easy transport in today's smaller vehicles. The exclusive Pin-Set™ Handle Lock does away with nuisance adjustments that are common with friction handle locks. Steel construction with commercial-quality components include ball bearing wheels, commercial grade cord and grips, a solid steel handle lock and the durable 1.5 HP dual-capacitor motor. The BlackHawk buffer can deliver 24/7 reliable results for years to come.

#### Power

- 1.5 HP, 66 frame, rectified dual capacitor motor
- 115V, 60 Hz power. Strain relief 14-3 SJT power cord.

#### Drive System

- Triple-planetary 10:1 helical-cut commercial gears drive pads and brushes at 175 RPM

#### Engineered Design

- The all steel handle removes easily by pulling two locking pins. Disassembles in 60 seconds, no tools required.
- Quality welded steel construction
- Pin Set™ Handle Lock adjusts the handle to 4 heights
- 17" or 20" brush covers. 360 degree wraparound bumpers.
- Thumb-operated safety switch. Dual steel operating trigger.
- Negative pressure on/off switch
- Sturdy 1" x 5" non-marking ball bearing wheels
- Includes Hawk Lok™ economy pad driver

#### Safety Features

- Quiet 56 dB operation. Meets GS42 standard.
- Built with UL approved components

#### Accessories

- Dust pickup, splash guard, hexagonal weights, 20 lb. frame weights, 4.5 gallon solution tank, brushes, pads and drivers, sandpaper drivers. Details and part numbers pages 38-39.



### Specifications

Model #	BLKHWK17	BLKHWK20
Part #	F0009-BH	F0012-BH
Machine Size	17"	20"
Pad Size	16"	19"
Pad Speed	175 RPM	175 RPM
Amp Draw	5.9 Amp	6.5 Amp

All Models	
Motor	66 frame, 1.5 HP rectified DC motor
Power	115V / 60 Hz (230V Option)
Power Cord	50 ft. (14-3) SJT power cord with molded plug
Drive System	Triple-planetary 10:1 helical-cut gears
dB Rating	66 dB - Meets GS42 standard

Subject to Change Without Notice



Remove/Install the  
Handle in 60 Seconds



Exclusive Pin-Set™ Handle  
Lock - 4 Height Settings



Remove the Handle  
Mounting Pin w/o Tools



Hawk Lok™ Pad Driver  
Included with Machine





## BlackHawk 1250 20" High Speed Burnisher w/ AC Motor

### Burnishing, Refinishing



The BlackHawk 1250 Burnisher drives a 20" pad at 1250 RPM for efficient polishing of all hard floor finishes. The 1.5 HP 66 frame AC motor is powerful. The welded steel frame and chromed handle are durable and reliable. It is remarkably easy to handle and can be used on all types of hard floors. It is powered by a durable 1.5 HP TEFC (Totally Enclosed Fan Cooled) AC motor that requires little maintenance with a motor shroud that protects the inner working from dust and moisture.

#### Power

- 1.5 HP, 56 frame, TEFC dual capacitor AC motor
- 115V, 50/60 Hz power
- 50 ft., 14-3 STO power cord with molded plug

#### Drive System

- V-Belt drives pads at 1250 RPM

#### Engineering Design

- Welded heavy gauge steel frame. Chromed steel handle.
- Molded plastic pad cover with wraparound bumper
- Thumb-operated safety switch. Comfortable vinyl grips.
- Negative pressure on/off switch. Dual steel operating triggers.
- Multiple position handle adjustment
- Non-marking 1" x 5" non-marking ball bearing wheels
- Includes harpoon style flexible pad driver KIT2014 centering clamp
- Private brand colors; Black, Hammer-Silver, Red, Orange, Light Blue, Medium Blue, Yellow and Chrome

#### Safety Features

- Quiet operation - 58 dB. Meets GS42 standard.
- Built with UL listed components

#### Accessories

- Splash guard, dust filter A0009-2, white polishing pads, hogs hair burnishing pads, Details and part numbers on pages 41.

### Specifications

Model	BLKHWK 1250
Part#	F1250-20TE-BH
Motor	66 frame, 1.5 HP Rectified TEFC AC Motor
Drive System	Multi V-Belt Drive
Power	115V, 50/60 Hz power
Cord	50 ft., 14-3 STO power cord with molded plug
Pad Size	20"
Pad Speed	1250 RPM
Amp Draw	11.2 Amp
dB Rating	58 dB - Meets GS42 Standard
Weight	90 lbs.

Subject to Change Without Notice



All Steel Construction  
Handle, Frames



Harpoon Style Pad Driver  
with Pad Centering Clamp



Use with 20" Hogs Hair  
Pads and Centering Clamp



Optional Splash Guard  
**SPLASH20 - 20"**



## BlackHawk 1500 20" High Speed Burnisher w/DC Motor

### Burnishing, Refinishing



The BlackHawk 1500 Burnisher drives a 20" pad at 1500 RPM for efficient polishing of all hard floor finishes. The 1.5 HP 66 frame DC motor is powerful. The welded steel frame and chromed handle are durable and reliable. The 1500 is available in 7 colors plus chromed surfaces - great for private branding.

#### Power

- 1.5 HP, 66 frame, DC rectified motor
- 115V, 60 Hz power
- 50 ft., (14-3) STO industrial power cord with molded plug

#### Drive System

- V-Belt drives pads at 1500 RPM

#### Engineering Design

- Welded heavy gauge steel frame
- One piece chromed heavy-duty steel handle
- Molded plastic pad cover with wraparound bumper
- Thumb-operated safety switch. Comfortable vinyl grips.
- Negative pressure on/off switch. Dual steel operating triggers.
- Multiple position handle adjustment
- Non-marking 1" x 5" non-marking ball bearing wheels
- Includes harpoon style flexible pad driver with spring-style pad centering clamp (KIT2014)
- Private brand colors; Black, Hammer-Silver, Red, Orange, Light Blue, Medium Blue, Yellow and Chrome

#### Safety Features

- Quiet operation - 66 dB. Meets GS42 standard.
- Built with UL listed components

#### Accessories

- Splash guard, dust filter (A0009-2), white polishing pads, hogs hair burnishing pads. Details and part numbers on pages 41.



### Specifications

Model	BLKHWK 1500
Part#	F1500-20-BH
Motor	1.5 HP, 66 frame DC rectified motor
Drive System	Multi v-belt drive
Power	115V, 50/60 Hz power
Cord	50 ft., 14-3 STO power cord with molded plug
Pad Size	20"
Pad Speed	1500 RPM
Amp Draw	13.5 Amp
dB Rating	66 dB - Meets GS42 standard
Weight	92 lbs.

Subject to Change Without Notice



All Steel Construction  
Handle, Frames



Harpoon Style Pad Driver  
with Pad Centering Clamp



KIT2013  
Use with 20" Hogs Hair  
Pads and Centering Clip



Optional Splash Guard  
**SPLASH20 - 20"**



### Dry Floors, Circulate and Exhaust Air

The BH33ADT is the ultimate axial fan – packed with features including variable speed control producing up to 3,600 CFM with a low 2.4 Amp draw, a 3-hour timer, a 360-degree rotation rack/stand, and built-in daisy chain power outlets w/ circuit breakers.

The BH33ADT has specially designed blades for more efficient air flow generation and extended air flow range. This allows the proper amount of air flow for any task at hand.

#### Power

- 1/3 HP thermally protected motor
- 115V, 60 Hz power
- 2.4 Amp draw with 12 AMP circuit breaker
- 20 ft., 14-3 STO power cord
- 12 Amp auxiliary outlet

#### Engineering Design

- Fully variable speed from 0 to 3600 CFM
- Fully adjustable 360 degree positions
- 3 Hour Timer is molded into frame
- Blade design moves air farther than other air movers
- Injection molded housing is lightweight and durable
- 33" diameter, ABS plastic fan blade
- Unit dimensions (L x W x H), 22.6" x 23.2" x 11.4"
- Weight 24.9 lbs.

#### Safety Features

- ETL listed



### Specifications

<b>Model#</b>	<b>BH33ADT</b>
<b>Motor</b>	1/3 HP, 2.4 Amp Draw
<b>Speed</b>	Variable 0 to 3600 cfm
<b>Fan Blades</b>	16" molded plastic blades
<b>Housing</b>	ABS injection molded chassis
<b>Auxiliary Outlet</b>	12 Amp with circuit breaker
<b>Positions</b>	360 degree
<b>Power Cord</b>	20 ft. 14-3, thermally protected
<b>Unit Dimension</b>	21.9" x 9.8" x 22.5" (L x W x H)
<b>Weight</b>	24.9 lbs.

Subject to Change Without Notice



Stackable Chassis



Direct Air at Every Angle



Moves Air Up To  
60 Feet!



Move More Air with Daisy  
Chained Power





## Dry Floors, Circulate and Exhaust Air



**BH20DT**



**BH50**



### BH20DT - 1/5 HP, 3-Speeds up to 800 CFM

The multipurpose BH20DT air mover is affordable, lightweight (10 lb.) and easy to transport. It fits easily into tight areas, crawl spaces, closets and hallways. Includes an auxiliary 12 Amp outlet for connecting multiple units in series. The 3-hour timer and speed control allows precise controlled operation

### BH50 - 1/2 HP, 3-Speeds up to 2800 CFM

BH50 is the best choice for a lightweight and mobile air mover that does not compromise on power or performance.

With a 1/2 HP motor capable of up to 2,800 CFM and running at an energy efficient 5.0 Amps, this unit weighs less than 20 lbs. Four adjustable positioning angles allow the BH50 to dry carpets, floors, walls and large areas quickly and efficiently. Stackable and manufactured with rugged state-of-the-art injection mold technology.

### Engineered Design

- Strong polypropylene chassis design allows multiple air movers to be stacked on top of another
- Molded-in handle for easy transport
- Direct airflow at 0, 15, 45 and 90 degrees
- The plastic cage protects motor and fans from debris
- Open air intake screens allow for maximum air output
- Model BH20DT includes a 12 Amp GFCI auxiliary power outlet
- Includes 10 ft. (BH20DT) and 20 ft. (BH50) power cord
- An optional transport cart is available for BH50 model

## Specifications

Model	BH20DT	BH50
Motor 3 Speed	1/5 HP	1/2 HP
CFM	800 cfm	2,800 cfm
Amp Draw	2.3 Amp	5.0 Amp
Chassis	Injection Molded Polypropylene	
Auxiliary Power Outlet	12 Amp	No
3 Hour Timer	Yes	No
Thermal Protection	Yes	Yes
Power Cord	10 ft., (14-3) cord	20 ft., (16-3) cord
UL Listed	Yes	Yes
Unit Dimensions (L x W x H)	10.7" x 12.4" x 13.3	15.9" x 15.7" x 16.3"
Weight	9.9 lbs.	19 lbs.


Subject to Change Without Notice



12 Amp Aux. Power Outlet on BH20



BH20DT Moves More Air with Daisy Chained Power



Air Flow in 4 Angles



Optional Telescopic Transport Cart for BH50  
BH50-WHLKT



### Dry Floors, Circulate & Exhaust Air

Hawk Industrial Air Mover with 1/2 HP, 3-speed industrial motor will move air consistently to 2950 CFM. Built with super-tough polyethylene frame for long-term use in the toughest of applications; construction, manufacturing, and house keeping applications. Metal cage and safety discharge guard.

#### Power

- 0.5 HP, 3-speed motor
- 115V, 50/60 Hz power. 230V available.
- 12 Amp draw with circuit breaker
- 25 ft., (16-3) SJTOW power cord with molded plug
- Top mounted, quick change 3-speed switch

#### Engineering Design

- Three air flow speeds - 2950 cfm, 2500 cfm and 2000 cfm with switch on frame
- Continuous-duty rugged ball bearing motor
- Polyethylene housing with lifetime warranty
- Metal cage and air discharge guard
- Steel handle
- 4 rubber feet for non-slip positioning
- Stackable for easy storage
- Convenient size - 19.5" x 14.5" x 18.25"
- Available in 2 colors; medium blue, and black. Special colors with 25 pieces.

#### Safety Features

- UL Listed
- Quiet operation with sound levels: Low 59 dB, Medium 62 dB, High 64 dB. Meets GS42 standard.



### Specifications

<b>Model#</b>	BH001-3S		
<b>Part #</b>	BH001-BLACK, BH001-DKBLUE		
<b>Motor</b>	0.5 HP, 3-speed motor		
<b>Power</b>	115V, 50/60 Hz power		
<b>Motor CFM</b>	2000 cfm	2500 cfm	2950 cfm
<b>Amp Draw</b>	4.3 Amp	4.5 Amp	5.3 Amp
<b>Power Cord</b>	25 ft., (16-3) SJTOW power cord w/molded plug		
<b>Housing</b>	Polyethylene housing		
<b>Auxiliary Outlet</b>	12 Amp with circuit breaker		
<b>Positions</b>	0, 45 and 90 degrees		
<b>dB Rating</b>	59 dB (low speed), 62 dB (medium), 64 dB (high). Meets GS42 standard.		
<b>Size</b>	19.5" x 14.5" x 18.25"		
<b>Weight</b>	31 lbs.		

Subject to Change Without Notice



Frame in Blue  
and Black



Metal Carrying  
Handle



3-Speed Switch



### Large Area Vacuum Cleaning

The Hawk 20 gallon and 55 gallon tank vacuums are built for years of trouble-free service. Perfect for large volume recovery of liquids and solid wastes

#### 20 Gallon Engineering Design

- The 20 gallon model is built with a strong roto-molded, easy to clean tank. The tank moves with (2) 10" wheels and (2) 4" front swivel casters, steered with the black powder-coated steel handle.
- The 20 gallon model has disposable paper filter bags for easy cleanup **#HVWD20-117**
- Optional front-mount squeegee **#V006FMS**

#### 55 Gallon Engineering Design

- The 55 gallon model uses a steel band dolly with four 4" caster wheels.
- Optional drain valve **#V006-55VALVE**

#### Both Models

- 2-stage, 2 HP, 115V, 60 Hz heavy duty bypass motor. (230V option).
- 50 ft., 16-3 SJT power cord
- An automatic liquid shut-off prevents motor flooding with foam or solution
- Includes 1.5" x 30" tank drain hose
- Includes wet/dry tool kit **#HVWD20-117**
- Includes an acid and mildew resistant non-pleated synthetic high efficiency filter for longer machine life

#### Safety Features

- Quiet operation - 78 dB. Meets GS42 standard.



### Specifications

Model #	HVWD-20-117	HVWD-55-117
Part #	V006-20	V006-55
Motor	2 HP, 2-stage bypass	2 HP, 2-stage bypass
Power Supply	115V / 60 Hz	115V / 60 Hz
Power Cord	50 ft. 16-3 SJT	50 ft. 16-3 SJT
Air Flow	110 CFM	110 CFM
Water Lift	117 inches	117 inches
Tank Capacity	20 Gal.	55 Gal.
Tank	Roto-molded Poly	55 Gallon Steel
Capacity	17 Gallon Wet / 1 Bushel Dry	51 Gallon
dB Rating	78 dB	78 dB
Dimensions	22" x 22" x 34"	35" x 35" x 55"
Weight	62 lbs.	124 lbs.

Subject to Change Without Notice



Optional Front Mount  
Squeegee (**V006FMS**)



55 Gallon Drain Valve  
(**V006-55VALVE**)



55 Gallon Tank Vac  
Includes Transport  
Frame



Washable Cloth  
Vacuum Bags  
(**WDH0001ASSY**)





### Portable Vacuum Cleaning

Carry vacuum cleaning power on your shoulders. The top fill design on this lightweight, compact backpack vac will prevent clogging so that you can optimize your cleaning time. 6.5 quart tank capacity extends use time. The ergonomic construction of this 10.5 lb. vacuum makes it ideal for cleaning in small areas.

#### Power

- 1-Stage NBP motor with thermal protection
- Short pigtail power cord. Includes 50 ft., 16-3 power cord with molded plug.

#### Engineered Design

- Roto-molded polyethylene housing is tough, durable and easy to clean. Lifetime housing warranty.
- Lightweight - 10.5 lbs. machine reduces user fatigue
- Comfortable harness and padded shoulder straps with quick-lock adjustable fasteners
- Exceptional filtration capability. The Harrier captures fine particles and helps improve air quality.
- 8 rubber feet for maximum, diffused air exhaust
- Use the disposable paper filter bags (HPVA005-3) or washable cloth filter (HPV-BACK-CLTH-BAG)
- Complete tool kit includes flex hose, telescopic wand, 1-piece curved wand, round dusting brush, two-way flat (for hard and soft floors) and crevice tool

#### Safety

- 72 dB quiet operation
- UL Listed



#### Specifications

Model #	Harrier I
Part #	V001-H1-115
Motor	1 stage, 1120 Watt motor
Power	115V, 50/60 Hz power. (230V option).
Amp Draw	7.0 Amp
Water Lift	96"
Air Flow	144 cfm
Housing	Roto-Molded Polyethylene
Power Cord	50 ft. 16-3 STO power cord w/molded plug
Size	8" x 9" x 21"
dB Noise Rating	72 dB
Weight	10.5 lbs. with cord

Subject to Change Without Notice



Powerful 1-Stage  
Motor



Washable Cloth Bags  
#HPV-BACK-CLTH BAG



Lightweight Power



Disposable Paper  
Vacuum Bags  
#HPVA005-3



## HAWK Hot Shot Mini-Vactor Carpet & Upholstery Extractor

### Portable Extraction Cleaning

The Mini-Vactor is more than an ordinary spotter. This affordable, powerful, compact unit is designed for superior carpet and upholstery cleaning. The in-line water heater makes cleaning faster.

#### Power

- 1 HP, 2-Stage vacuum motor. 110V, 60 Hz
- 13 Amp, 700 W in-line water heater works at 130°F
- 3-position power switch
- 16 ft. (14-3) STO power cord with molded plug

#### Engineered Design

- 3.1 gal. solution tank, 3.5 gal. recovery tank
- 45 psi oscillating vacuum pump
- Aluminum lock holds the solution tank to the recovery tank
- 8 ft. vacuum and solution hoses
- Float ball shut-off in the recovery tank protects the vacuum motor from water damage
- Spin-off cover on the lift-off recovery tank makes dumping and rinsing easy
- 3-position switch allows the operator to choose the pre-spray mode with no vacuum, the spray and vacuum mode, and the vacuum only mode
- Includes 4" stainless steel hand wand
- Optional 2-piece, stainless-steel wand with 10 in. head, 10 ft. vacuum hose and solution hose

#### Safety Features

- Quiet operations - 58 dB. Meets GS42 standard.



MADE IN  
THE USA

### Specifications

Model #	3000-Heat
Solution Tank	3.1 Gallons
Recovery Tank	3.5 Gallons
Power	115V, 60 Hz, 3-Position Power Switch
Amp Draw	13 Amp
Heater Power	700 W, 130 degrees F
Water Lift	85 inch
Solution Pump	Oscillating Type, 45 PSI
Power Cord	16 ft., (14/3) with molded plug
dB Rating	58 dB - Meets GS42 Standard
Chassis	Roto-Molded Polyethylene with Handle
Size	9"W x 18"T x 20"L
Weight	27 lbs. (Machine plus handle and hose)

Subject to Change Without Notice



Optional Vacuum  
Wand Set



3.1 Gallon Solution Tank  
is Easy to Fill



The Recovery Tank Lifts  
off the Vacuum  
Motor Frame



3.5 Gallon Recovery  
Tank is Easy to Dump  
and Rinse



### Spotting, Tight Spaces, Baseboards, Stairs

The Talon Edger Floor Machine is designed to scrub built-up dirt in corners and on baseboards without bending and back-breaking effort. Scrub with pads or with optional bonnets or brushes. Includes the pad driver and an assorted pad startup kit.

#### Power

- 1/8 HP, DC motor
- 115V, 50/60 Hz power
- 50 ft., (16-3) SJT detachable 2-piece power cord

#### Drive System

- Enclosed, durable gear belt drives brushes and pads at 500 RPM

#### Engineered Design

- 2 sizes - 6" and 8" pad drivers
- Handle height adjusts from 47" to 52" with locking pin
- Heavy-duty molded housing is virtually indestructible
- The metal handle collapses over for easy transport and storage
- Unique Mag-Lok™ holds pad drivers and brushes to machine without the need for tools
- Optional bristle brushes, pads and bonnets driver

#### Safety Features

- Built with UL approved components




Red Scrub (5)  
6" AS009-CS  
8" AS009-8CS




White Polish (5)  
6" AS011-CS  
8" AS011-8CS



Black Strip (5)  
6" AS010-CS  
8" AS010-8CS



Pad Driver (1)  
6" AS003-6  
8" AS003-8




Nylon (1)  
6" AS002-6  
8" AS002-8



Grit (1)  
6" AS005-6  
8" AS005-8



Nylon Edger (1)  
6" AS002-6  
8" AS002-8



Grit Edger(1)  
6" AS005-6  
8" AS005-8



Bonnet (6)  
6" AS008-6  
8" AS008-8



ELKHART, IN




### Specifications

Model #	Talon-6	Talon-8
Part #	F0036-115-BLK	F0036-116-8BLK
Motor	1/8 HP, 115V DC	1/8 HP, 115V DC
Power	115V, 60 Hz	115V, 60 Hz
Brush Size	6"	8"
Amp Draw	1.1 Amp	1.1 Amp
Brush Speed	500 RPM	500 RPM
Power Cord	50 ft., (16-3) SJT 2-Piece	50 ft., (16-3) SJT 2-Piece
Size	6"x11"x47" Adjustable to 52"	8"x11"x47" Adjustable to 52"

Subject to Change Without Notice



Talon Scrubs in  
Tight Spaces



3 Steel Drive Pins Mount  
Brushes/Pad Driver



Adjustable Handle Height  
Locks to Position





### High Speed Burnishing of Hardest Finishes

The Hawk Propane is an ultra-high speed propane burnisher that gives floor care professionals the performance features of higher priced units in one affordable package. Available in two widths and two builds. Rugged, reliable, easy-to-use, and economical.

#### Power

- Kawasaki 18 HP propane motor with electric start. No batteries to recharge.
- Premium fuel regulating system
- Engine is EPA and CARB certified
- Low exhaust emissions system on Kawasaki engines
- Electric or battery engine start options

#### Engineered Design

- Heavy duty, American made aluminum deck casting
- Adjustable caster wheels for fine tuning of pad pressure
- Belt drive transmission turns pads at 1800 RPM
- Flexible pad drivers provide excellent pad to floor contact
- Oversize drive bearing
- Handle is ergonomically designed, adjusts easily for operator comfort
- Premium catalytic muffler
- Heavy-duty steel 20 lb. propane tank
- Modular change components
- Available in Dust Collection models
- Available in a Clutch Drive models

#### Safety Features

- Quiet 89 dB operation
- UL/CUL listed starter and ignition for safety assurance

HPP27



HPP27DC  
with Clutch  
& Dust Control

### Specifications

Model	HPP21	HPP21DC	HPP27	HPP27DC
Part #	F0028	F0028DC	F0029	F0029DC
Machine Size	21"	21"	27"	27"
With Clutch	No	Yes	No	Yes
With Dust Control	No	Yes	No	Yes
Kawasaki Motor	18 HP	18 HP	18 HP	18 HP
Motor Speed	3600 RPM	3600 RPM	3600 RPM	3600 RPM
Pad Size	21"	21"	27"	27"
Pad Speed	2000 RPM	2000 RPM	2000 RPM	2000 RPM
Drive System	Belt drive	Belt drive	Belt drive	Belt drive
Productivity	25,000 sq. ft./hour	25,000 sq. ft./hour	33,000 sq. ft./hour	33,000 sq. ft./hour
Machine Size	22.8"x48"	22.8"x48"	32.5"x64.2"	32.5"x64.2"
Steel Tank	20 lbs.	20 lbs.	20 lbs.	20 lbs.
dB Rating	89 dB	89 dB	89 dB	89 dB
Weight	187 lbs.	187 lbs.	200 lbs.	200 lbs.

Subject to Change Without Notice



Adjustable Height Ergonomic  
Handle for Operator Comfort



V-Belt Drives Pads  
at 2000 RPM



Optional Splash Ring



Optional Active Dust  
Control Kit



## Rotary Brushes



Tampico Polishing Brush  
A0021 - 13"  
A0035 - 15"  
A0004 - 17"  
A0005 - 20"  
All rotary machines



Poly Scrub Brush  
A0020 - 13"  
A0036 - 15"  
A0002 - 17"  
A0003 - 20"  
All rotary machines



20/28 Nylon  
Carpet Brush  
A0016 - 13"  
A0037 - 15"  
A0006 - 17"  
A0007 - 20"  
All rotary machines




80 Grit Brush  
A0018 - 13"  
A0038 - 15"  
A0008 - 17"  
A0009 - 20"  
All rotary machines



Hawk Safe Spin Carpet  
Brush with Glide Plate  
A0060 - 17"  
A0058 - 20"  
All rotary machines

## Pads, Pad Drivers & Hardware



Hawk Tufted Bristle  
Pad Driver  
A0010-4 - 17"  
A0011-3 - 20"



Premium Harpoon  
Pad Driver  
A0017 - 13"  
A0034 - 15"  
A0010 - 17"  
A0011 - 20"



Red Scrubbing Pad  
(5 Pack)  
A0026-13R-CS - 13"  
A0026-15R-CS - 15"  
A0026-17R-CS - 17"  
A0026-20R-CS - 20"



Black Stripping Pad  
(5 Pack)  
A0026-13BK-CS - 13"  
A0026-15BK-CS - 15"  
A0026-17BK-CS - 17"  
A0026-20BK-CS - 20"



Pad Centering  
Clamp - Screw Mount  
KIT2013



Pad Centering  
Clamp - Spring Mount  
KIT2014

## Floor Prep Tools



Surface Prep Scraper  
HP0035 - 13"  
N/A - 15"  
HP0033 - 17"  
HP0034 - 20"  
Models: XHD, Brute,  
Pro, Osprey, Glide,  
Glide 2-Speed,




Orbitec Diamond  
Pad Driver  
HP0018 - 13"  
N/A - 15"  
HP0017 - 17"  
HP0020 - 20"  
Models: XHD, Brute,  
Pro, Osprey, Glide,  
Glide 2-Speed



Diamond Pad Driver  
A0017DPD - 13"  
A0010DPD - 17"  
A0011DPD - 20"  
Models: XHD, Brute,  
Pro, Osprey, Glide,  
Glide 2-Speed,



Weighted Diamond  
Pad Driver  
A0017WTDPD - 13" (25#)  
A0010WTDPD - 17" (46#)  
A0011WTDPD - 20" (64#)  
Models: XHD, Brute,  
Pro, Osprey, Glide,  
Glide 2-Speed,



Premium Sandpaper  
Driver  
A0014-HD - 17"  
A0014-1HD - 20"  
Models: XHD, Brute  
XHD 2-Speed, Pro,  
Osprey, Glide, Glide 2-  
Speed,



80 Grit Brush  
A0018 - 13"  
A0038 - 15"  
A0008 - 17"  
A0009 - 20"  
All rotary machines



### Rotary Floor Machine Accessories



Dust Pickup Systems  
for 66 Frame Open Motor  
Rotary Machine Models  
**HP0031-DC17-STANDKIT**  
**HP0031-DC20-STANDKIT**



Dust Pickup System for  
180 Frame TE Motors  
Rotary Machine Models  
**HP0031-DC17-BRUTEKIT**  
**HP0031-DC20-BRUTEKIT**  
(for 180 Frame, TE Frame  
Open Motor Models)



Dust Pickup Systems  
for All WD Rotary Design  
Models  
**HP0031-DC17-GLIDE**  
**HP0031-DC20-GLIDE**  
Models: Glide,  
Glide 2-Speed, Merlin,  
Merlin 2-Speed



Splash Guard  
**SPLASH13 - 13"**  
**SPLASH15 - 15"**  
**SPLASH17 - 17"**  
**SPLASH20 - 20"**  
Models: Mighty, HD, HD 2-  
Speed, XHD, XHD 2-Speed,  
Brute, TEXHD, Osprey,  
BlackHawk




Splash Guard  
**SPLASH17-WD - 17"**  
**SPLASH20-WD - 20"**  
Models: Glide, Glide 2-  
Speed, Merlin, Merlin 2-  
Speed



(1) Horseshoe Wt.  
**25 lbs. A0032-1P**  
**36 lbs. A0032-3P**  
Recommend for 11:1 XHD  
Gear Models Only



Hexagonal Weight for  
Rotary Motor Mount  
**A0028-10P - 10 lbs.**  
**A0028-25P - 25 lbs.**  
Models: HD, 2-Speed, Brute,  
Merlin, TEXHD, Glide

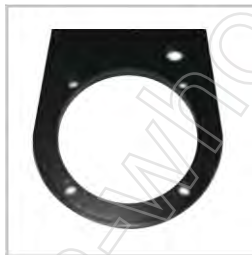

20# Frame Weight  
**A0032-2P**  
Recommend for 11:1 XHD  
Gear Models Only



Weight Post Mount  
for Hexagonal Weights  
**HP-0008-45**  
Use on 66 Frame Motors



Weight Post Mount  
for Hexagonal Weights  
**#HP0008-45INCHBRUTE**  
Use on 180 Frame TEFC  
Motors



2.5 Gallon Solution Tank  
**A001-BLK25 - Black**  
Models: Mighty



4 Gallon Solution Tank  
5 Stock Colors  
3 Special Order Colors  
**A0001-COLOR4**  
Colors: BLK4, CHAR4,  
DKBLUE4, LTBLUE4, NAT4  
Models: with Chromed  
Tube Handle Post, HD,  
HD 2-speed, XHD, XHD 2-  
Speed, Brute, TEXHD,  
Osprey, Glide, BlackHawk



4.5 Gallon  
Solution Tank  
**SME-MERLIN4**  
for Merlin, Wingspan



6 Gal. Solution Tank  
**SNE-2QR6BLK**  
for Wingspan, Merlin



Vacuum Assembly Kit  
**TH1011**





#### Orbital Machine Accessories



Wrap-Around Dust Apron  
HP0031-DC-TIGER2014  
HP0031-DC-TIGER2814



Vacuum Assembly Kit  
TH1001



2.5 Gallon Solution Tank  
A001-RAPBLK2.5 - Black  
Models: G2 Raptor, 1410,  
2014, 2814, RedTail



4 Gallon Solution Tank  
A001-4GLIDE BLACK,  
A001-4GLIDE NATURAL  
Models: 2014, 2814,  
RedTail



Full Wraparound  
Dust Skirt  
HP0031-DC-TIGER2014  
Models: 2014, Red Tail



Orbital Scrub Brush  
20" x 14"  
A0076-2014


#### Orbital Pads & Screens



Red Orbital Scrubbing  
Pads - 5 Case




Black Orbital  
Stripping Pads - 5 Case




Green Astro Textured  
Surface Pads - 4 Case



Maroon Chemical Free  
Pads - 10 Case



Orbital Pad Starter Kit  
(1) Green, (1) Red  
(2) Black, (2) Maroon



Abrasive Screens  
5 Case

Orbital Pad Color	10" x 14" for TigerHawk 1410	20" x 14" for TigerHawk 2014 G2 Raptor, Red Tail	28"x14" For TigerHawk 2814
Red (5/cs.)	A0066-1410-CS	A0066-2014-CS	A0066-2814-CS
Black (5/cs.)	A0069-1410-CS	A0069-2014-CS	A0069-2814-CS
Green Astro (4/cs.)	A0072-1410-CS	A0072-2014-CS	A0072-2814-CS
Maroon (10/cs.)	A0064-1410-CS	A0064-2014-CS	A0064-2814-CS
Orbital Starter Kit (1 black, 1 green, 1 red, 2 maroon)	A0075-1410PADKIT	A0075-2014PADKIT	A0075-2814PADKIT
Red Heat Screen 80 Grit	A0074-1410-80	A0074-2014-80	A0074-2814-80
Red Heat Screen 120 Grit	A0074-1410-120	A0074-2014-120	A0074-2814-120
Red Heat Screen 180 Grit	A0074-1410-180	A0074-2014-180	A0074-2814-180



## High Speed Machine Accessories



Optional Splash Guard  
**SPLASH13** - 13"  
**SPLASH15** - 15"  
**SPLASH17** - 17"  
**SPLASH20** - 20"



Dust Filter  
**A00029-2**



7 Private Brand Colors  
Plus Chrome



Dust Control (DC) Models  
Include Dust Ring and  
Dust Filter (**#A0029-2**)



Includes Flexible  
Harpoon-Style Pad Driver  
with Centering Clamp



Hogs Hair Burnishing  
Pads  
(5 Pack)  
**A0025-13P-CS** - 13"  
**A0025-15P-CS** - 15"  
**A0025-16P-CS** - 16"  
**A0025-17P-CS** - 17"  
**A0025-19P-CS** - 19"  
**A0025-20P-CS** - 20"



White Polishing Pads  
(5 Pack)  
**A0025-13P-W** - 13"  
**A0025-15P-W** - 15"  
**A0025-16P-W** - 16"  
**A0025-17P-W** - 17"  
**A0025-19P-W** - 19"  
**A0025-20P-W** - 20"



Pad Centering  
Clamp - Screw Mount  
**KIT2013**



Pad Centering  
Clamp - Spring Mount  
**KIT2014**



**Johnson Wholesale**  
**1 (828) 283 1999**